


HSF

NOTES:
 Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+33%G.F UL94V-0

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE ±0.05)

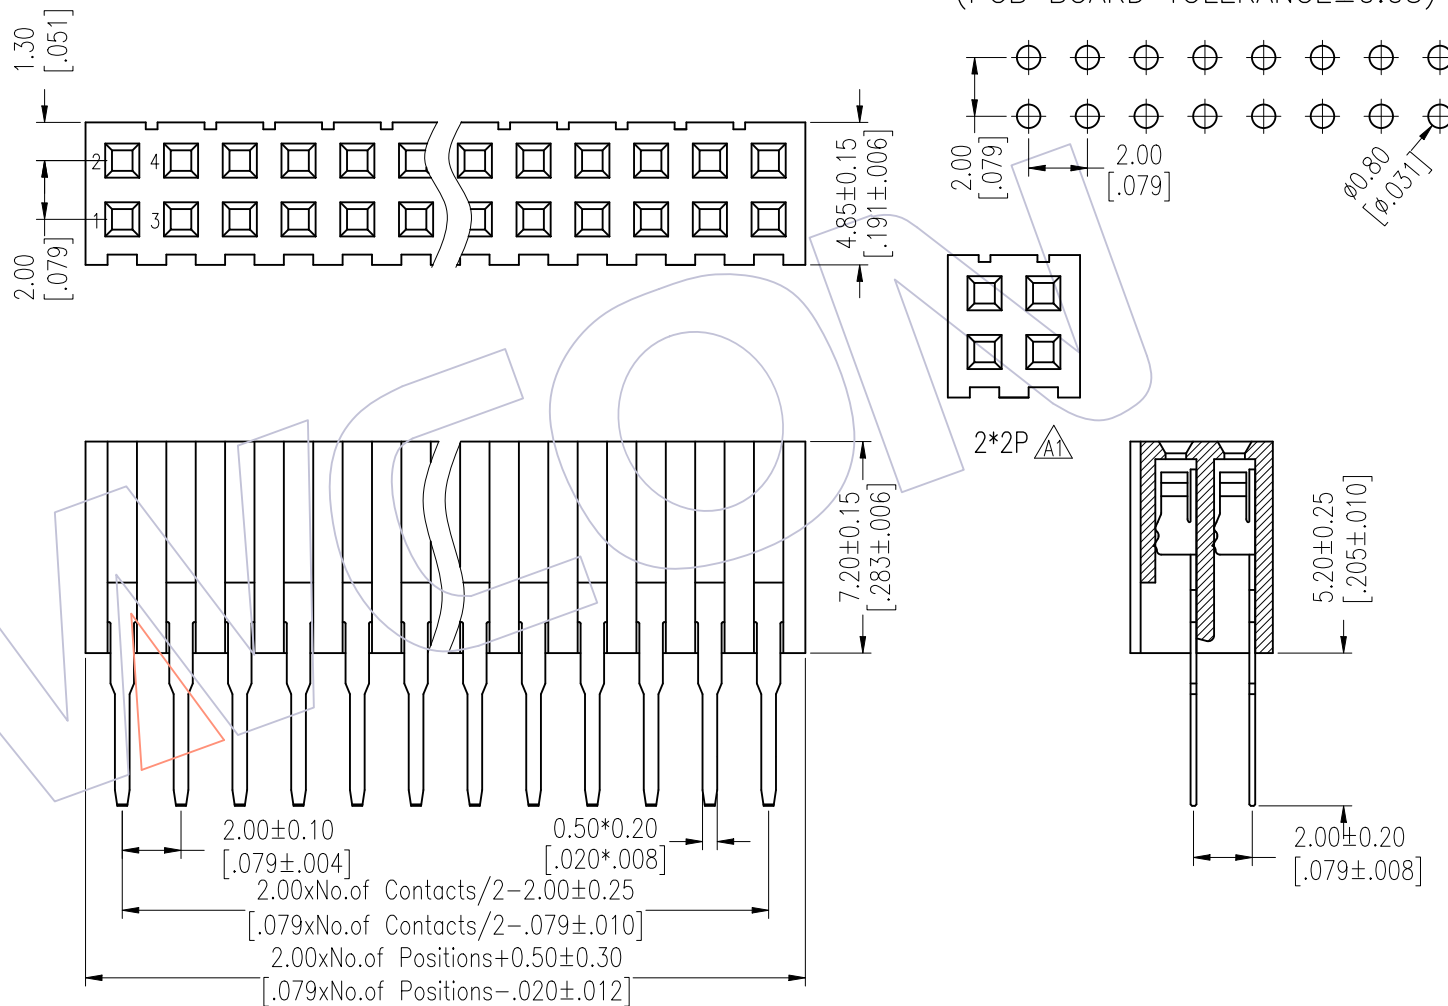

Ordering Information

2272-2 XX S XX CUN T 1

No. of Pins per Row: 02~40Pin
 Contact Plating:
 G0=Gold Flash
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 S0=Sel. Gold Flash/Tin
 S3=Sel. 10μ"Gold/Tin
 S4=Sel. 15μ"Gold/Tin
 S5=Sel. 30μ"Gold/Tin
 SN=Tin
 SM=Matte Tin
 Packing:
 T=Tube

| Item | Pitch | Mating |
|-----------|-------|-----------|
| Standard | 2.00 | 1215/1220 |
| Alternate | | |

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | OPERATION | DRAW | DATE | SCALE | FIT | PART NO. |
|-----|------------|--------------------------|--------|-----------|-------|------------|-------|-----|---|
| | | | | X.X | ±0.40 | 2021/08/20 | UNIT | mm | 2272-2XXSXXCUNT1 |
| A1 | 2021/08/20 | ADD 2*2P VIEW | ----- | X.XX | ±0.25 | DATE | SIZE | A4 | TITLE: |
| A0 | 2012/07/19 | NEW | ----- | X.XXX | ±0.15 | DATE | SHEET | 1/1 | FH2.00mm DUAL ROW 180°DIP REVERSE ENTER H=7.20 |
| | | | | Angle | ± 3° | APPROVE | PROJ. | | Customer NO. |
| | | | | DIM | TOL | DATE | | | |

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com