



HSF

NOTES:
 Rated Current:3.0AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-55℃ to +125℃

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:LCP+30%G.F UL94V-0

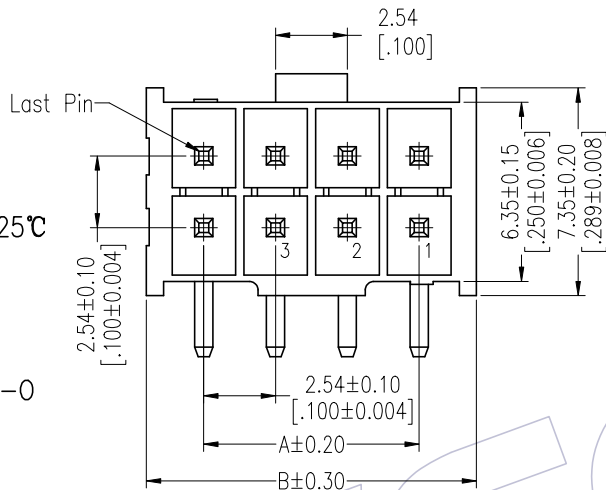

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

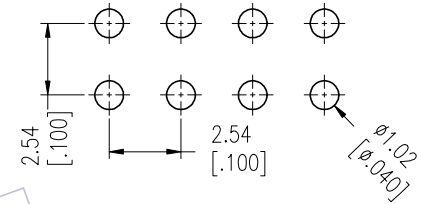



Specification & Ordering Information:

Circuit	Part No.	Dimension	
		A	B
2x02	WF2549-2WR02XXXXX	2.54	6.60
2x03	WF2549-2WR03XXXXX	5.08	9.14
2x04	WF2549-2WR04XXXXX	7.62	11.68
2x05	WF2549-2WR05XXXXX	10.16	14.22
2x06	WF2549-2WR06XXXXX	12.70	16.76
2x07	WF2549-2WR07XXXXX	15.24	19.30
2x08	WF2549-2WR08XXXXX	17.78	21.84
2x09	WF2549-2WR09XXXXX	20.32	24.38
2x10	WF2549-2WR10XXXXX	22.86	26.92
2x11	WF2549-2WR11XXXXX	25.40	29.46
2x12	WF2549-2WR12XXXXX	27.94	32.00
2x13	WF2549-2WR13XXXXX	30.48	34.54
2x14	WF2549-2WR14XXXXX	33.02	37.08
2x15	WF2549-2WR15XXXXX	35.56	39.62
2x16	WF2549-2WR16XXXXX	38.10	42.16
2x17	WF2549-2WR17XXXXX	40.64	44.70
2x18	WF2549-2WR18XXXXX	43.18	47.24
2x19	WF2549-2WR19XXXXX	45.72	49.78
2x20	WF2549-2WR20XXXXX	48.26	52.32
2x21	WF2549-2WR21XXXXX	50.80	54.86
2x22	WF2549-2WR22XXXXX	53.34	57.40
2x23	WF2549-2WR23XXXXX	55.88	59.94
2x24	WF2549-2WR24XXXXX	58.42	62.48
2x25	WF2549-2WR25XXXXX	60.96	65.02

Ordering Information

WF2549 -2 WR XX XX X X X

No. of Row: 02-25P
 No. of pins: 02-25P
 Contact Plating:
 S0=Gold Flash/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 Blank=Tin
 Color:
 B=Black
 E=Beige
 W=White
 T=Natural
 Packing:
 0=PE Bag
 T=Tube
 Running Number:
 1=2.16
 2=3.30

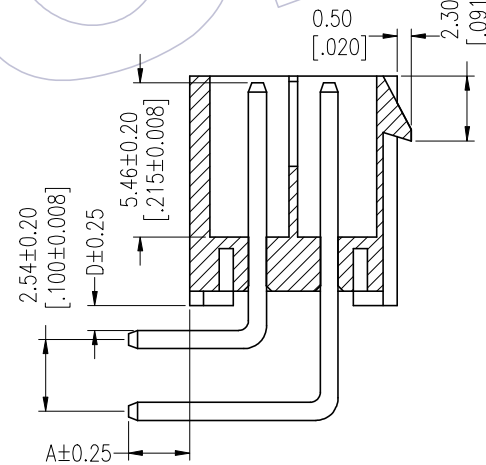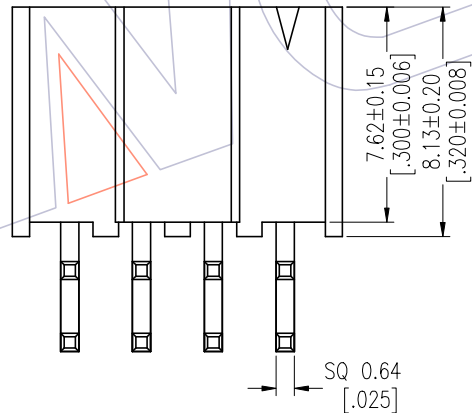

ITEM	A	D
Standard	2.16	0.88
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW Du Ying	DATE 2023/03/20	SCALE	FIT	PART NO. SEE TAB
				x.x	±0.40					
A2	2023/03/20	Modify PART NO.	Du Ying	x.xx	±0.25	CHECK	DATE	UNIT mm inch	A4	TITLE: 2.54mm WAFER 90° DIP
AO	2012/09/10	NEW	JYHuang	x.xxx	±0.15	APPROVE	DATE	SHEET 1/1		Customer NO.
				Angle	± 3'			PROJ.		

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com