


HSF




NOTES:

Current Rating:1A AMP
 Contact Resistance:30milliohm Max
 Withstand Voltage:250V AC/DC
 Insulation Resistance:1000Megohm Min
 Operation Temperature:-40°C to +105°C

Housing Material:PA9T+30%GF(UL94V-0)
 Contact Material:Phosphor Bronze
 Fixing Hardware Material:Phosphor Bronze
 Contact plating:Au or Sn over Ni Plating
 Fixing Hardware plating:Au or Sn over Ni Plating

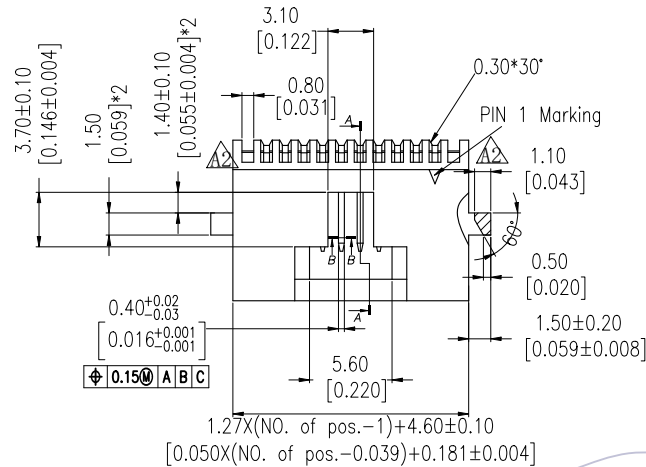

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

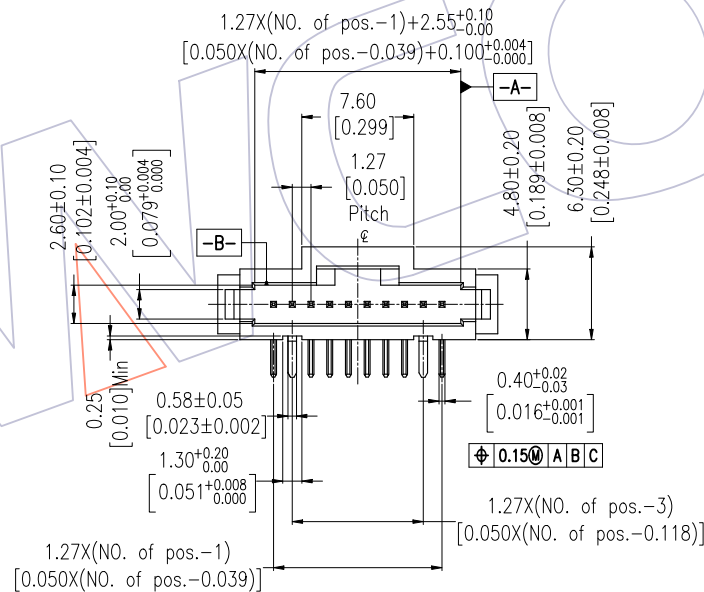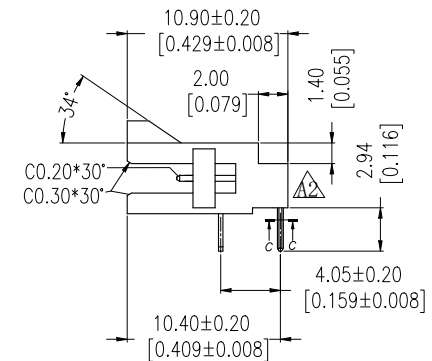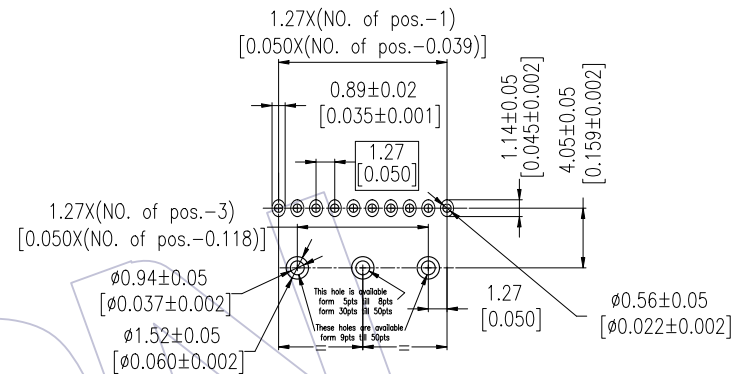


Ordering Information
3135-XX R XX B K00-X 4

No. of Pins	Contact Plating	Color Insulator	Packing
4 6 8	G0=Gold Flash	B=Black	A=Type
10 34	G3=10u"Gold	U=Blue	T=Tube
14 40	G4=15u"Gold	W=White	
16 44	G5=30u"Gold		
20 50	S0=Gold Flash/Tin		
24 60	S3=10u"Gold/Tin		
26 64	S4=15u"Gold/Tin		
30 80	S5=30u"Gold/Tin		
32 100	SN=Tin		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	 Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 WCON-Kunshan Tel: +86 512 57468408
A2	2016/01/16	MODIFY		X.X ±0.40	JYHuang	2016/01/16	UNIT mm		3135-XXRXXBK00X4	
A1	2015/01/20	MODIFY		X.XX ±0.25	CHECK	DATE	SIZE A4		TITLE: 1.27mm Box 90° DIP (With fixing hardware)	
A0	2013/08/27	NEW	—	X.XXX ±0.15	APPROVE	DATE	SHEET 1/2		Customer NO.	WCON-Dongguan Fax: +86 769 85358915 WCON-Kunshan Fax: +86 512 57468468 E-mail: sales@wcon.com E-mail: salesks@wcon.com
				Angle ± 3°			PROJ. 			

HSF

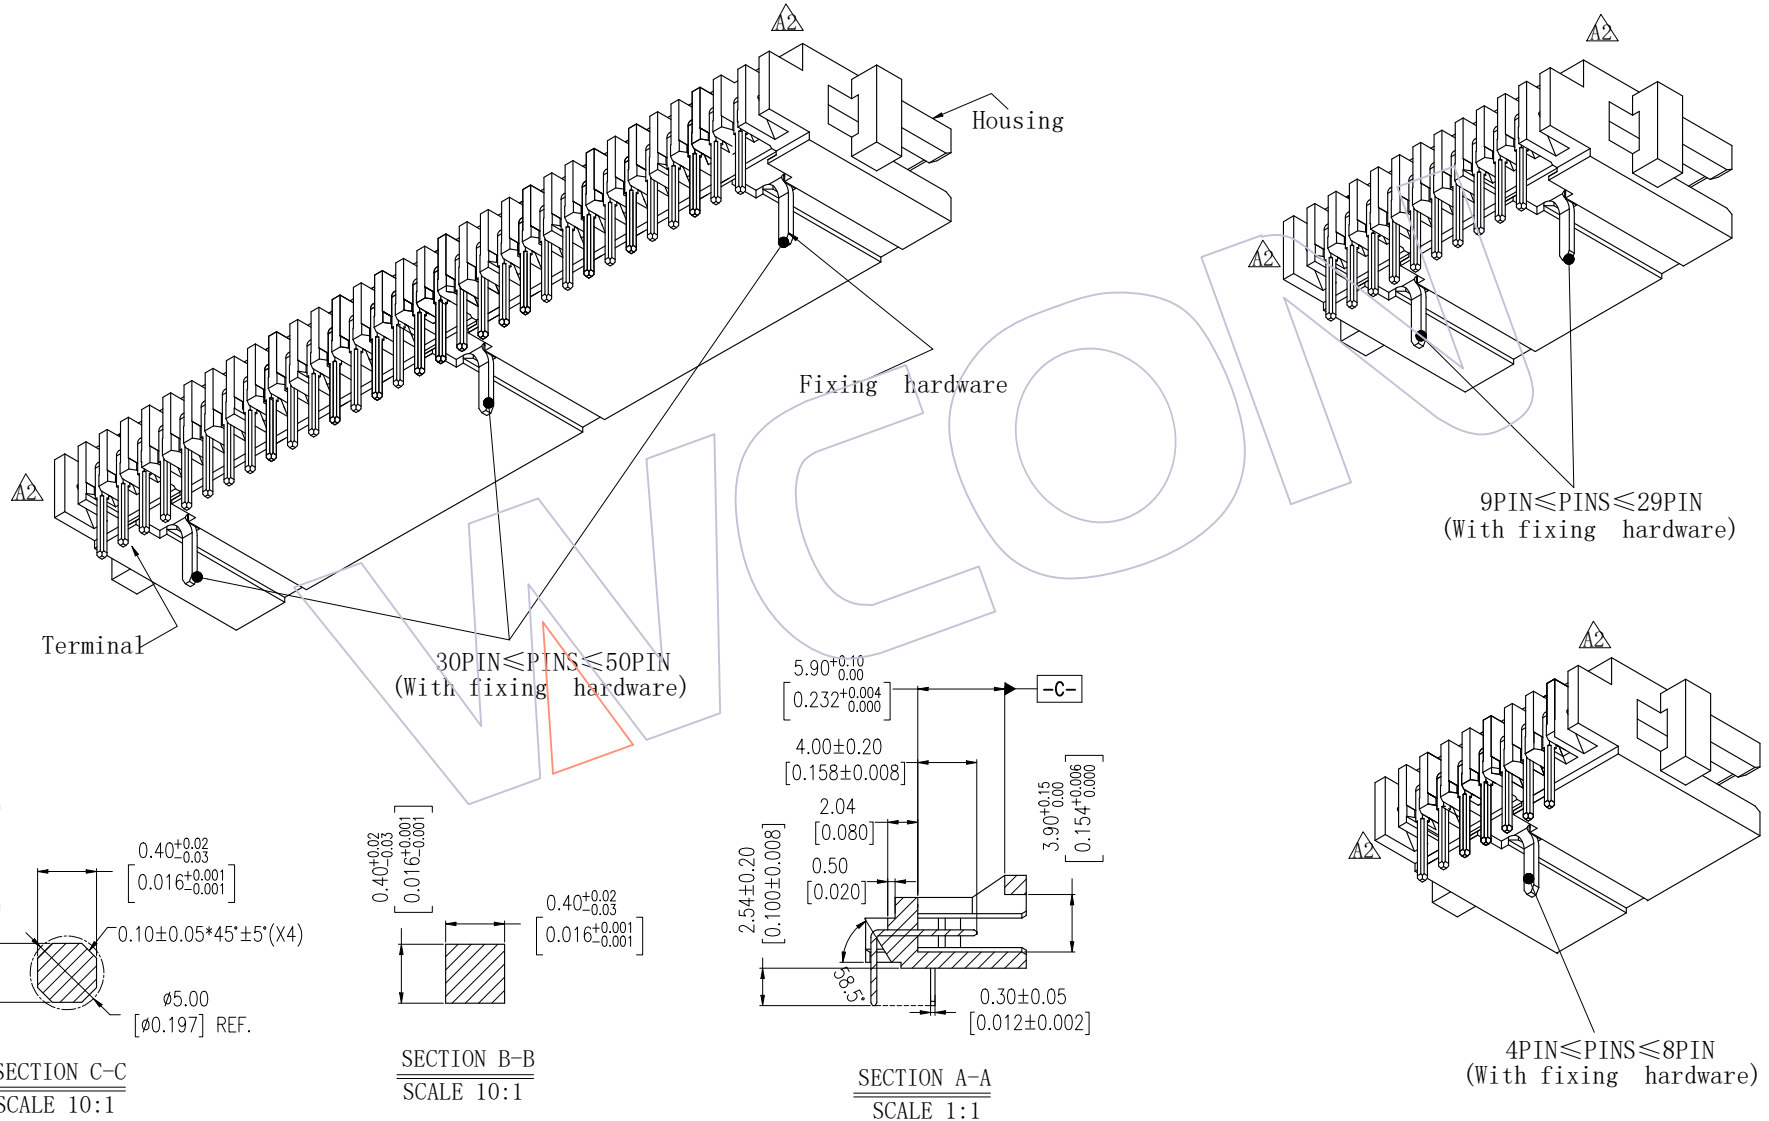

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE	FIT	PART NO.
				X.X	±0.40					
A1	2016/01/15	MODIFY		X.XX	±0.25	JYHuang	2016/01/15	UNIT	mm	3135-XXRXXBK00X4
A0	2013/08/27	NEW		X.XXX	±0.15	CHECK	DATE	SIZE	A4	
				Angle	± 3'	APPROVE	DATE	SHEET	2/2	TITLE:
				DIM	TOL			PROJ.		1.27mm Box 90° DIP (With fixing hardware)
										Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan	WCON-Kunshan
Tel: +86 769 85358920	Tel: +86 512 57468408
Fax: +86 769 85358915	Fax: +86 512 57468468
E-mail: sales@wcon.com	E-mail: salesks@wcon.com