

HSF

NOTES:
 Rated Current:1.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C



Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0 BK

Ordering Information



1315-21 XX XX S XXX C A XX

No.of Pins	Contact Plating	Pin Length	Insulator	Packing	Series No.
01~50	G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin	L=A+B+C	C=PA9T	A=Tray	01~99

	Pin Length	A	B	C	Mating
Standard	---	1.80	1.90	---	2321
	---	1.80	3.00	---	2334
	---	1.80	4.00	---	2344
Alternate					

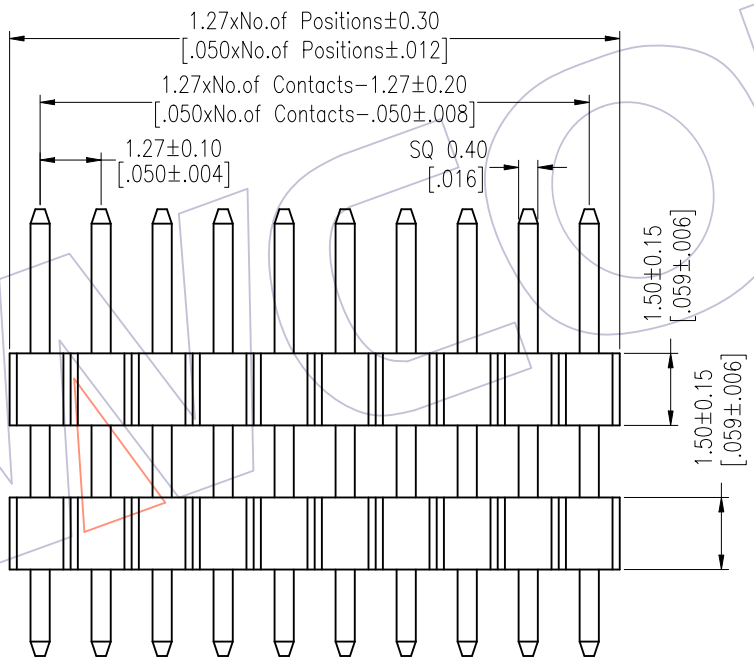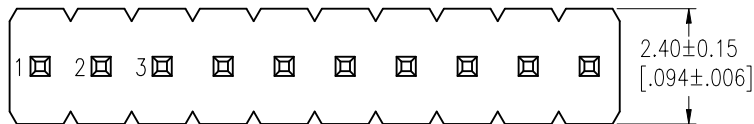

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

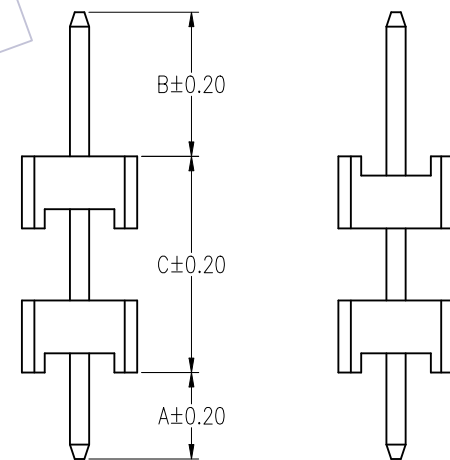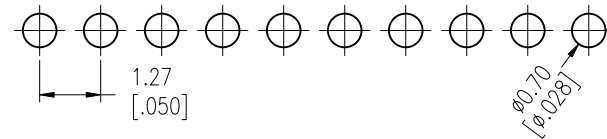

TYPE-1

TYPE-2

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A1	2018/01/15	MODIFY PART NO.	-----	x.x ±0.40	William Chen	2018/01/15	UNIT	mm [inch]	1315-21XXXXSXXCXXX
A0	2012/03/15	NEW	-----	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE: 1.27 Pin Header, SINGLE ROW, S/T, DOUBLE PLASTIC, H=1.5
				x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle ± 3'			PROJ.		
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--