

# HSF

NOTES:  
 Rated Current:1.0AMP.  
 Contact Resistance:20mΩ Max.  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min.  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:PA9T+33%G.F UL94V-0 BK

## Ordering Information


1315-22 XX XX S XXX C X XX

No. of Pins    Contact Plating    Pin Length    Insulator    Packing    Series No.  
 Per Row:02~50    G0=Gold Flash    L=A+B+C    C=PA9T    A=Tray    01~99  
 G3=10u"Gold    R=Tape&Reel+CAP  
 G4=15u"Gold    T=Tube  
 G5=30u"Gold  
 S0=Gold Flash/Tin  
 S3=10u"Gold/Tin  
 S4=15u"Gold/Tin  
 S5=30u"Gold/Tin  
 SN=Tin  
 SM=Matte Tin




Item	Pin Length	A	B	C	Mating
Standard	--	1.80	1.90	--	2321
	--	1.80	3.00	--	2334
	--	1.80	4.00	--	2344
	6.90	1.60	2.30	3.00	
	15.50	1.80	1.90	11.80	

TYPE-2

TYPE-1

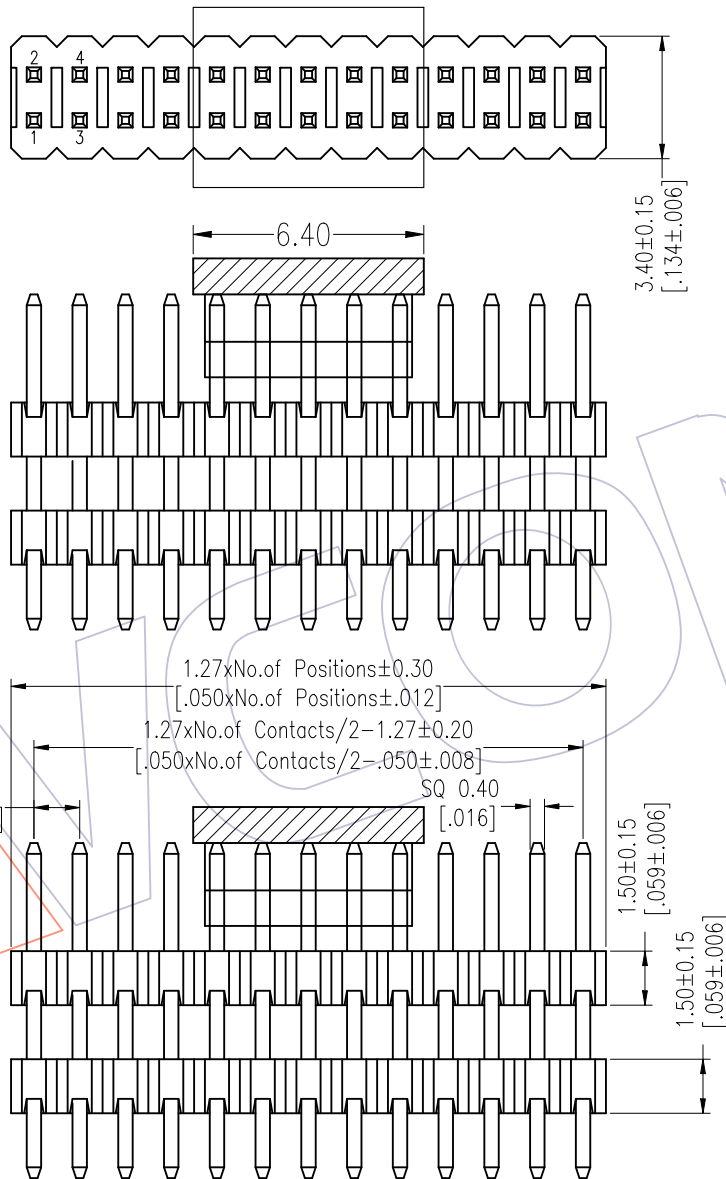

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)

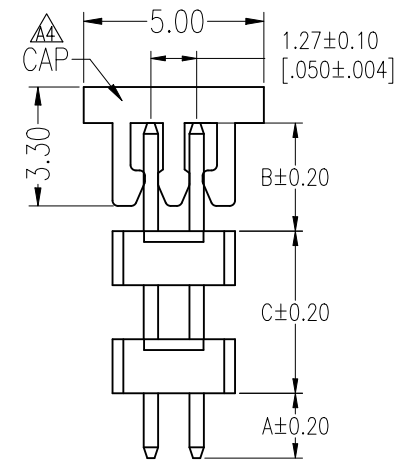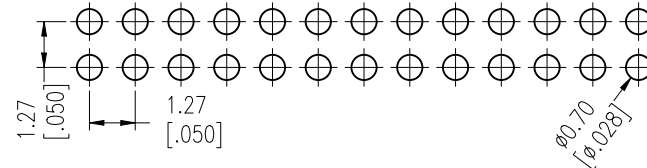

A4	2021/12/27	MODIFY CAP	Du Ying	OPERATION	DRAW	DATE	SCALE	Fit	PART NO. 1315-22XXXXXXXCXXX
A4	2021/01/19	ADD CAP	Du Ying	X.X ±0.40	Du Ying	2021/12/27	UNIT	mm [inch]	
A3	2019/02/14	MODIFY	Ding	X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: 1.27 Pin Header, DUAL ROW, S/T, DOUBLE PLASTIC, H=1.5
A0	2012/03/15	NEW	-----	X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ± 3°	APPROVE	DATE	PROJ.		Customer NO.
				DIM TOL					

# WCON

Http: www.wcon.com

WCON-Dongguan    WCON-Kunshan  
 Tel: +86 769 85358920    Tel: +86 512 57468408  
 Fax: +86 769 85358915    Fax: +86 512 57468468  
 E-mail: sales@wcon.com    E-mail: salesks@wcon.com