HSF

NOTES:
Current Rating:0.5A
Voltage Rating:50V AC/DC
Contact Resistance:50milliohm Max
Insulation Resistance:100Megohm Min
Operation Temperature:-20℃to+105℃

Housing Material:PA9T+30%G.F(UL94V-0)
Contact Material:Phosphor Bronze
Contact plating:Au or Sn over Ni

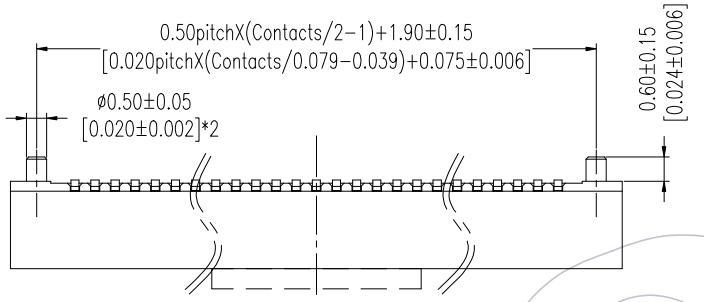

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

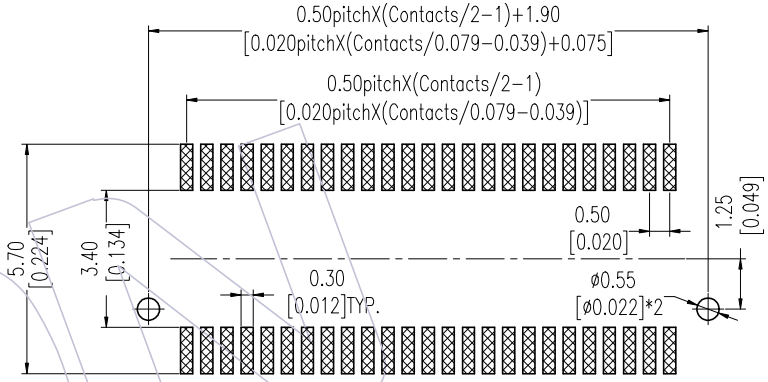

Ordering Information

3620-S XXX - 027 XX R 01

- No.of Pins
- Contact Plating: G1=3u"Gold, G2=5u"Gold
- T=Tube, P=Tube+CAP, R=Tape&Reel+CAP

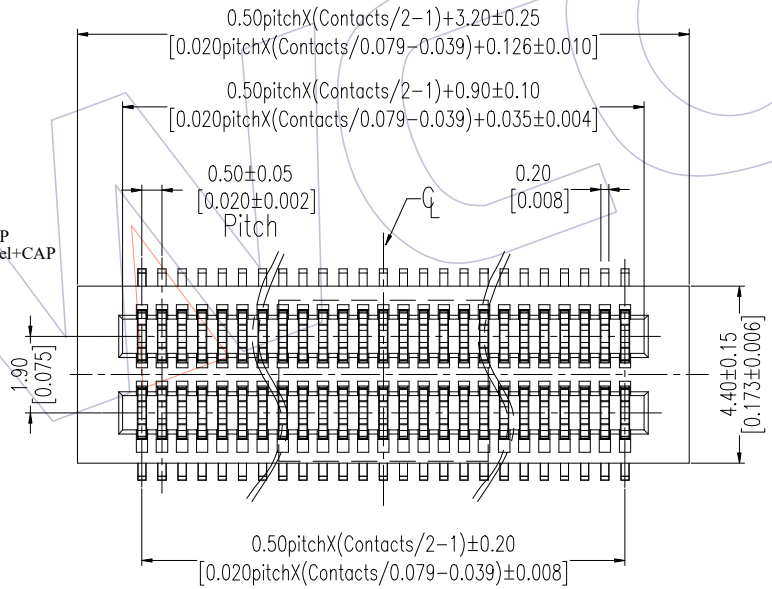

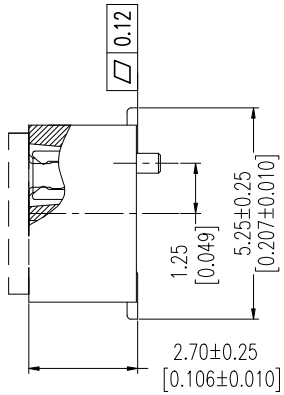

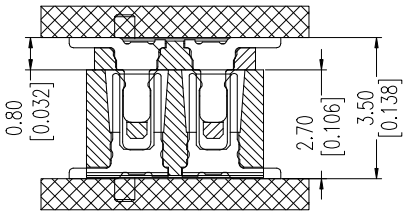

配合示意图

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2016/10/26	NEW	——

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	DingWenMin	DATE	2016/10/26
CHECK		DATE	
APPROVE		DATE	

SCALE	FIT
UNIT	mm / inch
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. 3620-SXXX-027XXR01

TITLE: 0.50mm B TO B FEMALE 180° SMT TYPE H=2.70

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com