

HSF

NOTES:
 Rated Current: 0.5~1.0 AMP. Δ
 Contact Resistance: 25m Ω Max.
 Withstand Voltage: 500V
 Insulation Resistance: 10000M Ω Min.
 Operation Temperature: -55 $^{\circ}$ C to +125 $^{\circ}$ C

Contact Material: Copper Alloy
 Contact Plating: Sn and Au over Ni
 Tail Material: Copper Alloy
 Tail Plating: Sn over Ni
 Main Body Material: High Temperature Thermoplastic(UL94V-0)

Ordering Information

3910-S XXX-136 M XX WR 1 W Δ


No. of Pins
 010: 10 Pin
 020: 20 Pin
 100: 100 Pin

Plating Δ
 S3=Sel.10U" Gold/Tin
 S4=Sel.15U" Gold/Tin
 S5=Sel.30U" Gold/Tin

Package R: Tape & Reel+Cap

Blank=W/O WCON
 W=W/T WCON

PIN	M
10~40PIN	0.12
42~100PIN	0.15

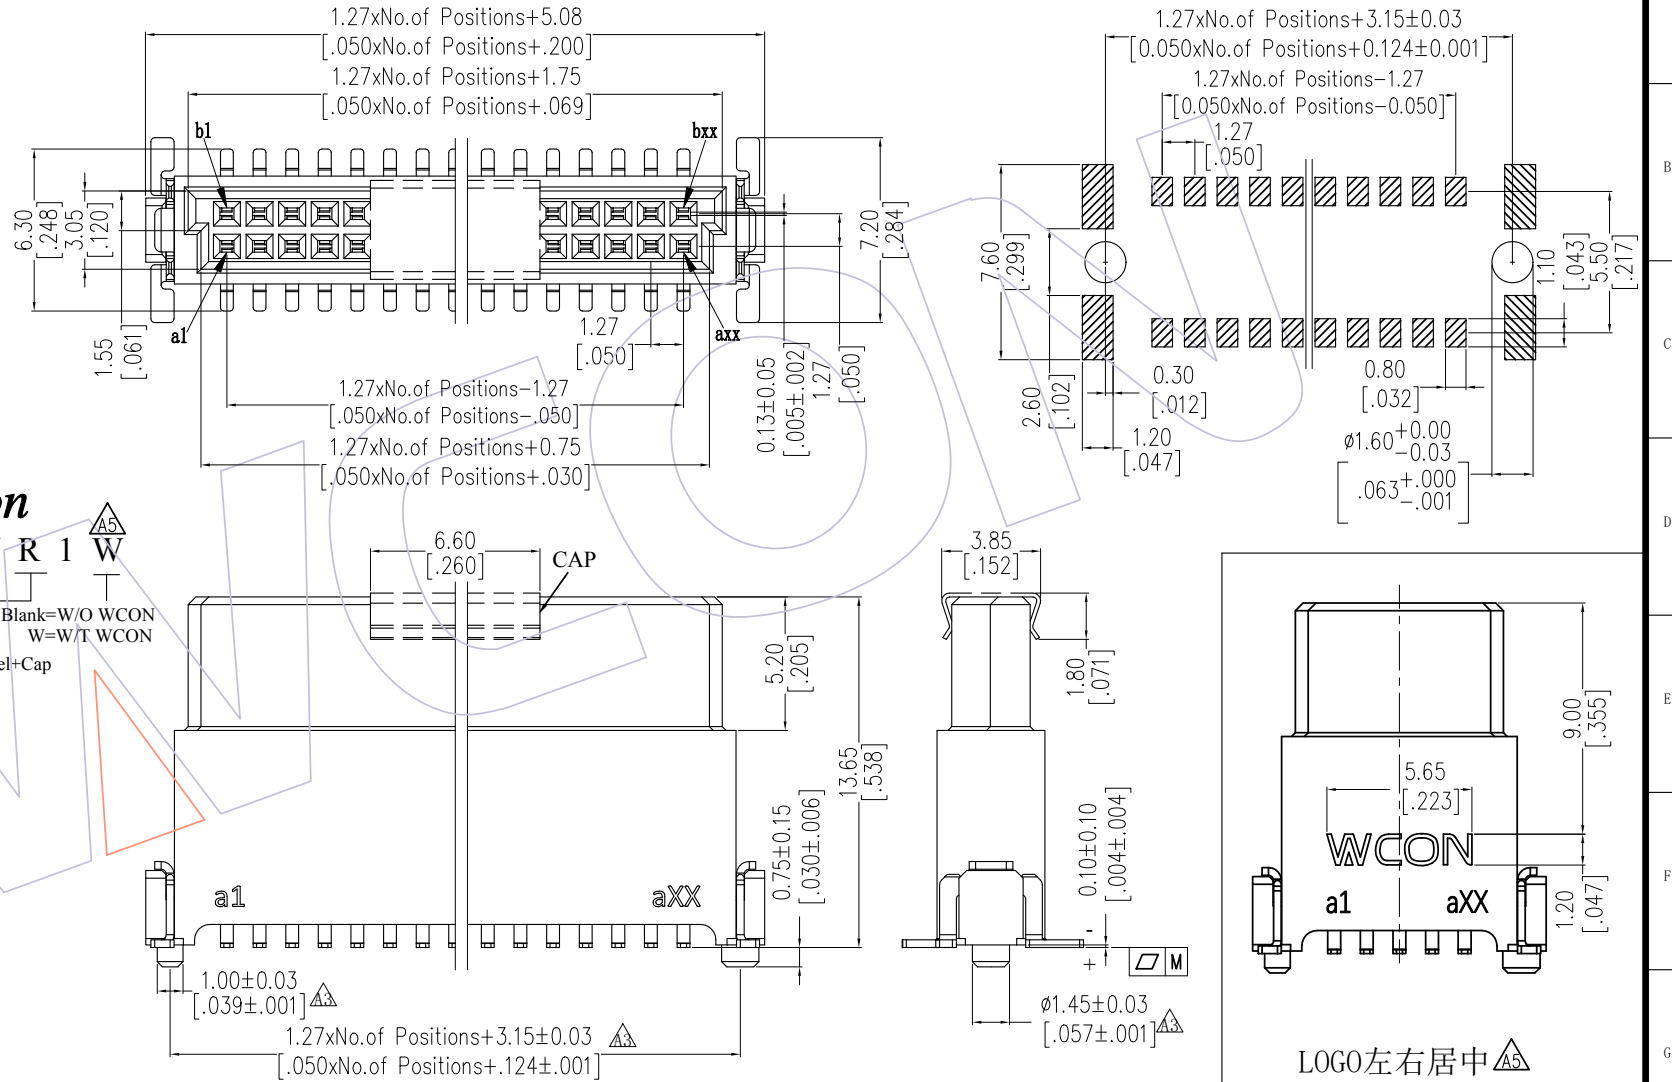

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE	SCALE	UNIT	SHEET	PROJ.	PART NO.	TITLE:	Customer NO.
A5	2020/11/12	Add W/T WCON LOGO SPEC&P/N	XSR			DRAW	2020/11/12	1:1	mm	1/1		3910-SXXX-136MXXWR1(W) Δ	1.27mm Pitch SDC CONNECTORS FEMALE"E"TYPE, H=13.6(TYPE B)	
A4	2019/12/12	Modify	XSR	x.x	± 0.40	XSR								
A3	2018/06/30	Modify		x.xx	± 0.25	CHECK								
A0	2017/08/28	NEW		x.xxx	± 0.15									
				Angle	$\pm 3^{\circ}$	APPROVE								
				DIM	TOL									

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com