
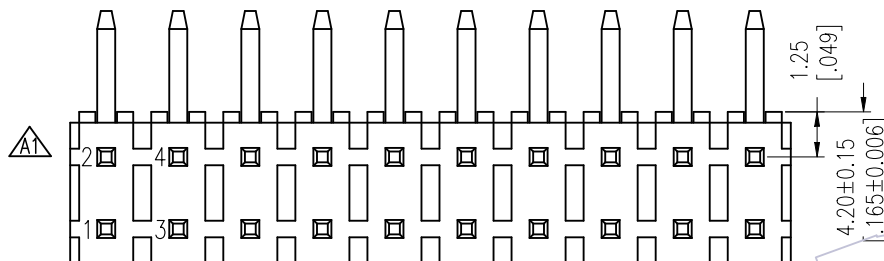


HSF

NOTES:
 Rated Current:2.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0 BK



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

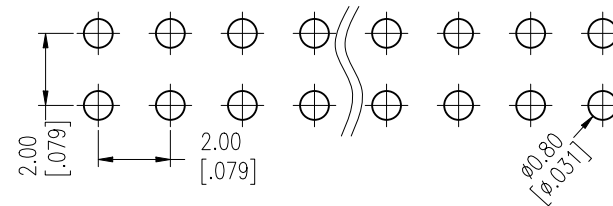

Ordering Information

1240-12 XX XX R XXX C 0 XX

No. of Pins	Contact Plating	Pin Length(Short)	Insulator	Packing	Series No.
Per Row:02~40	G0=Gold Flash	L=A+B+2.7	Material	0=PE Bag	01~99
	G3=10u"Gold	Standard:095=9.5	C=PA9T	T=Tube	
	G4=15u"Gold				
	G5=30u"Gold				
	S0=Gold Flash/Tin				
	S3=10u"Gold/Tin				
	S4=15u"Gold/Tin				
	S5=30u"Gold/Tin				
	SN=Tin				
	SM=Matte Tin				

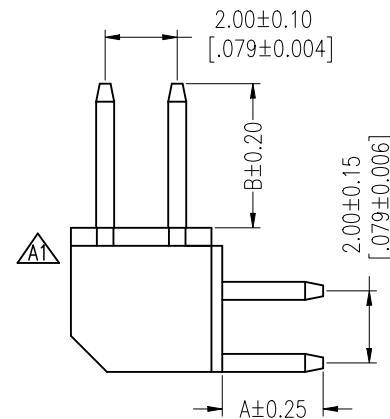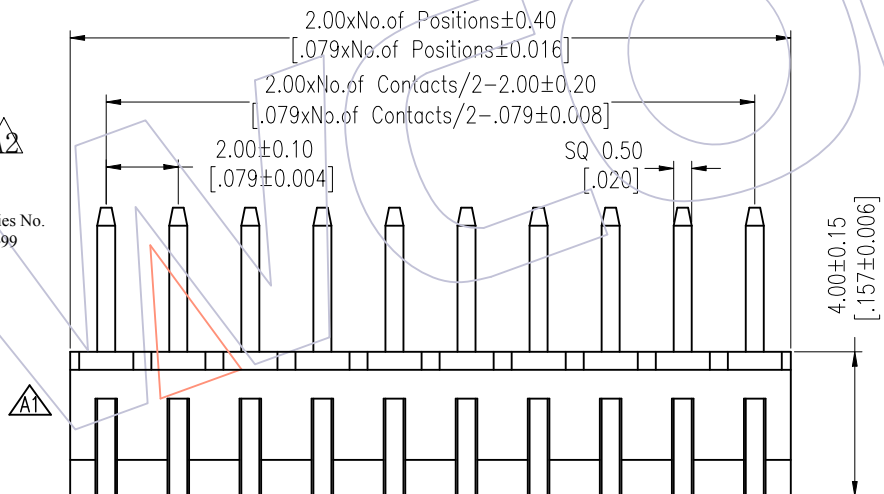

Item	Pin Length	A	B	Mating
Standard	9.50	2.80	4.00	2249 2250
Alternate				

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A2	2018/01/19	Modify P/N	A2	X.X ±0.40	Liu	2018.01.19	UNIT	mm	1240-12XXXXRXXXXC0XX A2
A1	2014/01/16	Modify drawing	A1	X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2012/04/26	NEW	-----	X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	PH2.00 DUAL ROW 90° H=4.0
				Angle ± 3°			PROJ.		Customer NO.
				DIM TOL					

WCON
 Http: www.wcon.com
 WCON-Dongguan WCON-Kunshan
 Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com