



HSF

NOTES:

Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to $+125^{\circ}\text{C}$ (Au)
 -40°C to $+105^{\circ}\text{C}$ (Sn)

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+33%GF UL94V-0

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

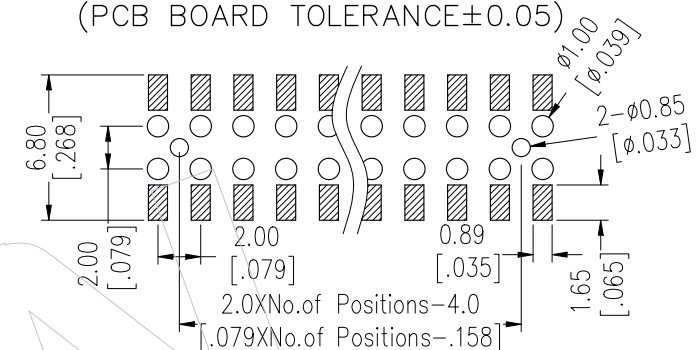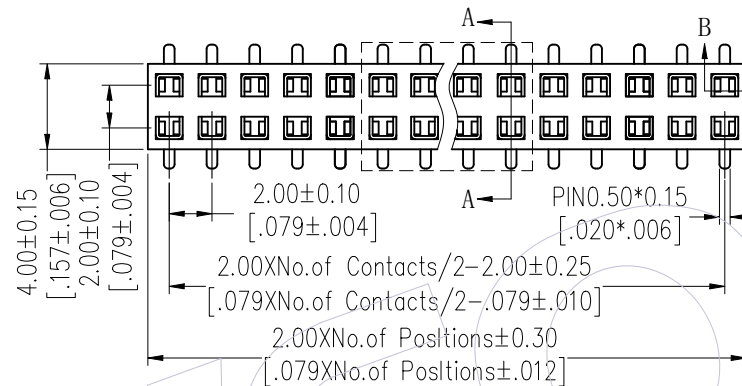

Ordering Information



2227T-2 XX M XX CUN X X

No. of Pins per Row: 02-40Pin


Contact Plating:
 G0=Gold Flash
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 SN=Tin

Packing:
 T=Tube
 P=Tube+CAP
 R=Tape&Reel+CAP

Series No.
 1=Type 1
 2=Type 2

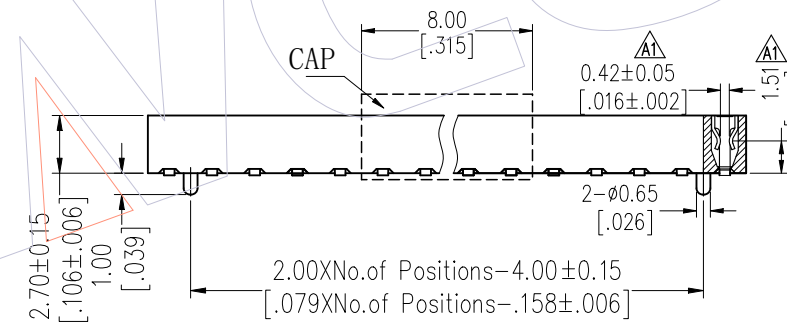

TYPE 1 W/O POST



TYPE 2 WITH POST

SECTION A-A

Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

Pin(Per Row)	2-15P	16-25P	26-40P
M	0.10	0.15	0.18

TITLE	PART NO.
TYPE 1	2227T-2XXMXXCUNX1
TYPE 2	2227T-2XXMXXCUNX2

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A1	2019/01/16	MODIFY DRAWING;ADD CAP FOR2*2P-2*4P	-----	x.x ±0.40	XSR	2019/01/16	UNIT	mm	SEE TABLE
A0	2012/07/12	NEW	-----	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE: 2.0mm Female Header DUAL ROW 180°SMT H=2.7
				x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle ± 3°			PROJ.		
				DIM TOL					

WCON
 Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com