

HSF

NOTES:

Current Rating:1.0A
Voltage Rating:100V AC,DC
Contact Resistance:20mΩ max
Withstand Voltage:800V AC/minute
Insulation Resistance:1000MΩ min
Operation Temperature:-25℃ to +85℃

Contact Material:Brass
Contact plating:Au or Sn Over Ni
Insulator Material:PA6T+30%G.F(UL94V-0)

Ordering Information




WF2001 - WZ XX X T 1

No. of pins
02~16P


Contact Plating
S0=Gold Flash/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
G0=Gold Flash
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
Blank=Tin

Color
B=Black
W=Natural

Packing
0=PE Bag
T= Tube
R= Reel

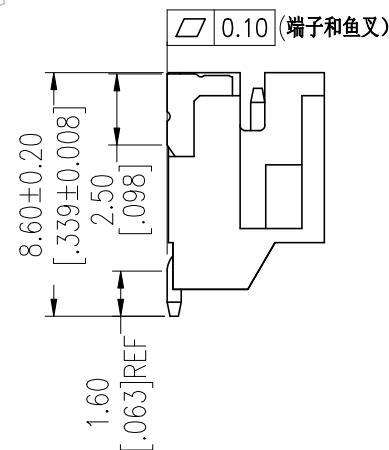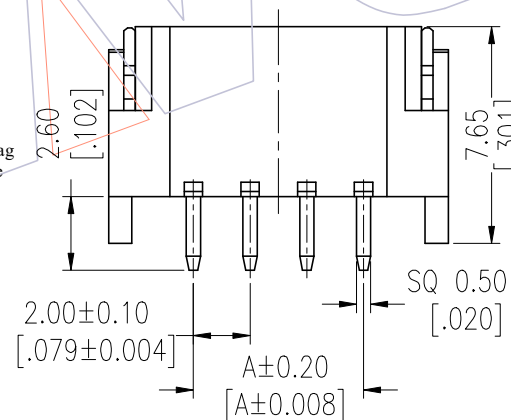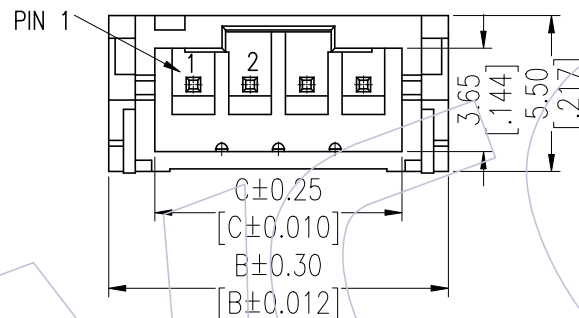

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

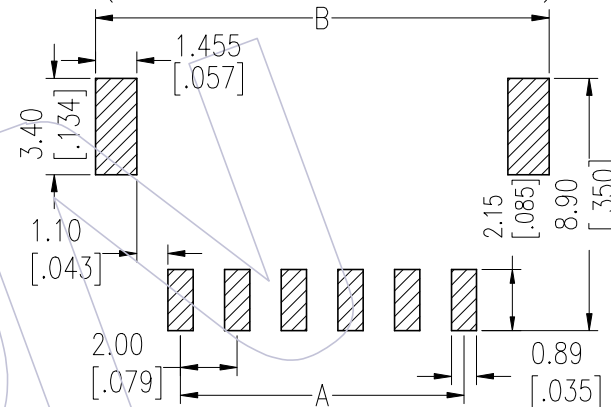

Dimensional & Ordering Information:

Circuit	Part No.	Dimension		
		A	B	C
02	WF2001-WZ02X01	2.0	8.0	4.72
03	WF2001-WZ03X01	4.0	10.0	6.72
04	WF2001-WZ04X01	6.0	12.0	8.72
05	WF2001-WZ05X01	8.0	14.0	10.72
06	WF2001-WZ06X01	10.0	16.0	12.72
07	WF2001-WZ07X01	12.0	18.0	14.72
08	WF2001-WZ08X01	14.0	20.0	16.72
09	WF2001-WZ09X01	16.0	22.0	18.72
10	WF2001-WZ10X01	18.0	24.0	20.72
11	WF2001-WZ11X01	20.0	26.0	22.72
12	WF2001-WZ12X01	22.0	28.0	24.72
13	WF2001-WZ13X01	24.0	30.0	26.72
14	WF2001-WZ14X01	26.0	32.0	28.72
15	WF2001-WZ15X01	28.0	34.0	30.72
16	WF2001-WZ16X01	30.0	36.0	32.72

				OPERATION		DRAW JYHuang	DATE 2012/08/25	SCALE UNIT mm	FIT A4	PART NO. SEE TABLE	
				X.X	±0.40					TITLE: "J"TYPE PH2.0 WAFER 90°SMT	
				X.XX	±0.25						
				X.XXX	±0.15						
AO	2012/08/25	NEW		Angle	± 3'	APPROVE	DATE	SHEET 1/1	PROJ.	Customer NO.	
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL						

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com