
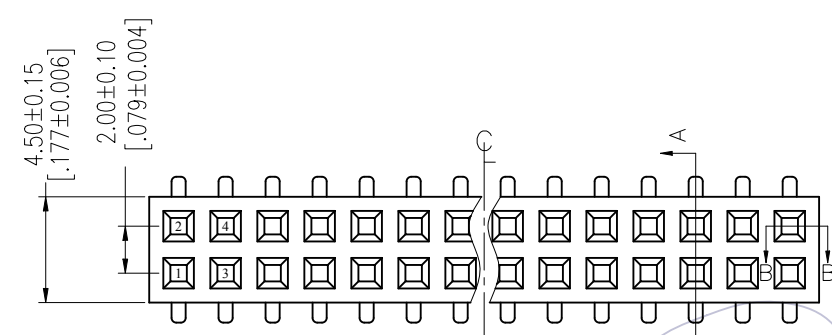


HSF

NOTES:
 Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%GF UL94V-0



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

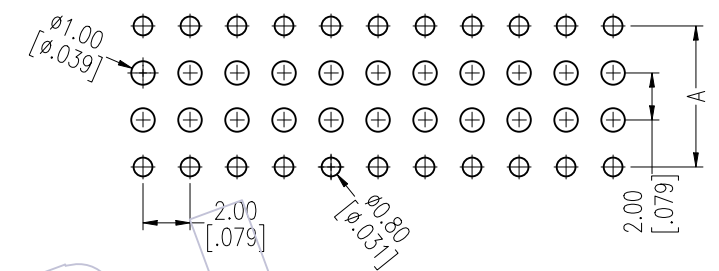

Ordering Information

2243-2 XX W XX CUN X X

- No. of Pins per Row: 02-40Pin
- Contact Plating: G0=Gold Flash, G3=10μ"Gold, G4=15μ"Gold, G5=30μ"Gold, S0=Gold Flash/Tin, S3=10μ"Gold/Tin, S4=15μ"Gold/Tin, S5=30μ"Gold/Tin, SN=Tin, SM=Matte Tin
- Packing: T=Tube, A=Tray
- Series No.: 1=TYPE 1, 2=TYPE 2

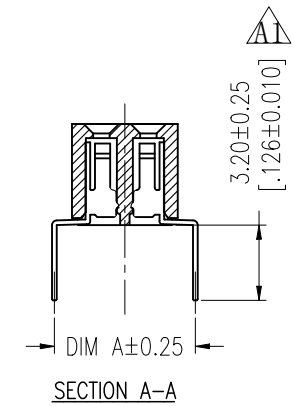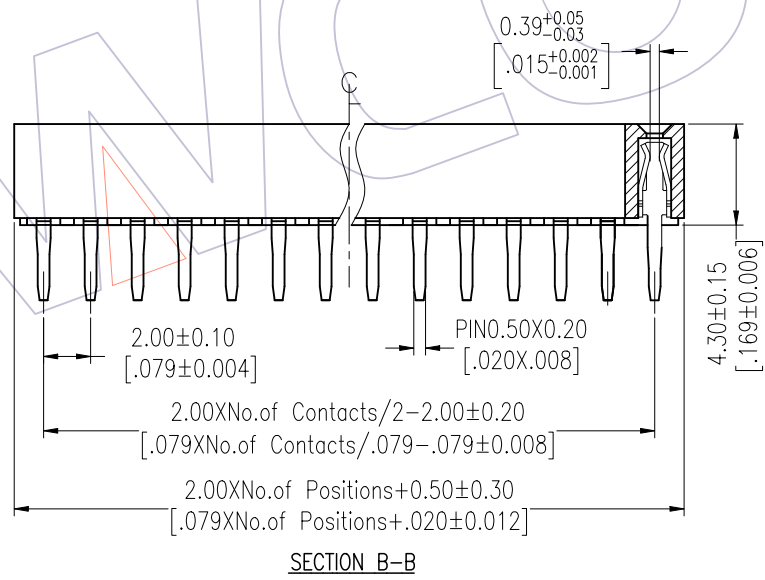

Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

TITLE	DIM A	PART NO.
TYPE 1	6.00	2243-2XXWXXCUNX1
TYPE 2	5.00	2243-2XXWXXCUNX2

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A1	2015/09/14	Modify 3.00 to 3.20	A1	X.X ±0.40	Allen	2015/09/14	UNIT mm		2243-2XXWXXCUNXX
A0	2012/07/14	NEW	-----	X.XX ±0.25	CHECK	DATE	SIZE A4		TITLE: FH2.00mm DUAL ROW H=4.30 180°DIP
				X.XXX ±0.15			SHEET 1/1		Customer NO.
				Angle ± 3'	APPROVE	DATE	PROJ.		
				DIM TOL					

WCON
 Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915
 Fax: +86 512 57468468
 E-mail: sales@wcon.com
 E-mail: salesks@wcon.com