




HSF

NOTES:

Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%G.F UL94V-0

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

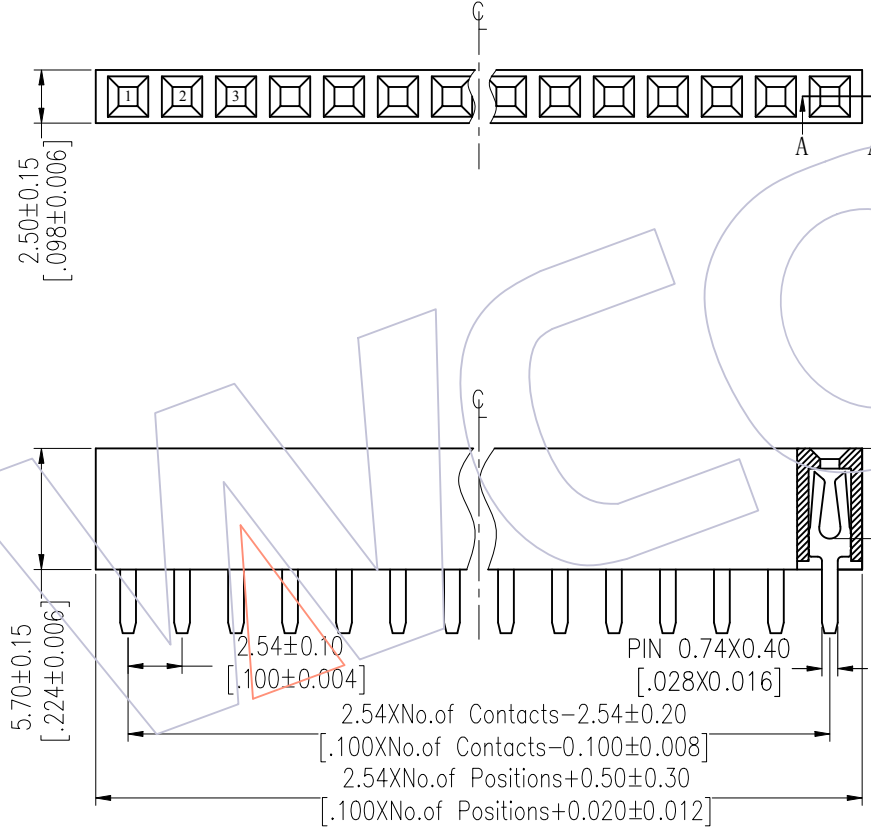

Ordering Information

2157 - 1 XX S XX CYN A 1

- No. of Pins per ROW: 02-40PIN
- Contact Plating:
 - G0=Gold Flash
 - G3=10μ"Gold
 - G4=15μ"Gold
 - G5=30μ"Gold
 - S0=Gold Flash/Tin
 - S3=10μ"Gold/Tin
 - S4=15μ"Gold/Tin
 - S5=30μ"Gold/Tin
 - SN=Tin
 - SM=Matte Tin
- Packing:
 - T=Tube
 - A=Tray

Item	Pitch	Mating
Standard	2.54	1115/1120/1125
Alternate		

SECTION: A-A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
AO	2012/08/10	NEW	-----	X.X ±0.40	JYHuang	2012/08/10	UNIT mm		2157-1XXSXXCYNX1
				X.XX ±0.25	CHECK	DATE	SIZE A4		TITLE: FH2.54 SINGLE ROW 180° DIP H=5.7
				X.XXX ±0.15	APPROVE	DATE	SHEET 1/1		Customer NO.
				Angle ± 3°			PROJ.		
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com