


HSF

NOTES:
 Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+33%G.F UL94V-0

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

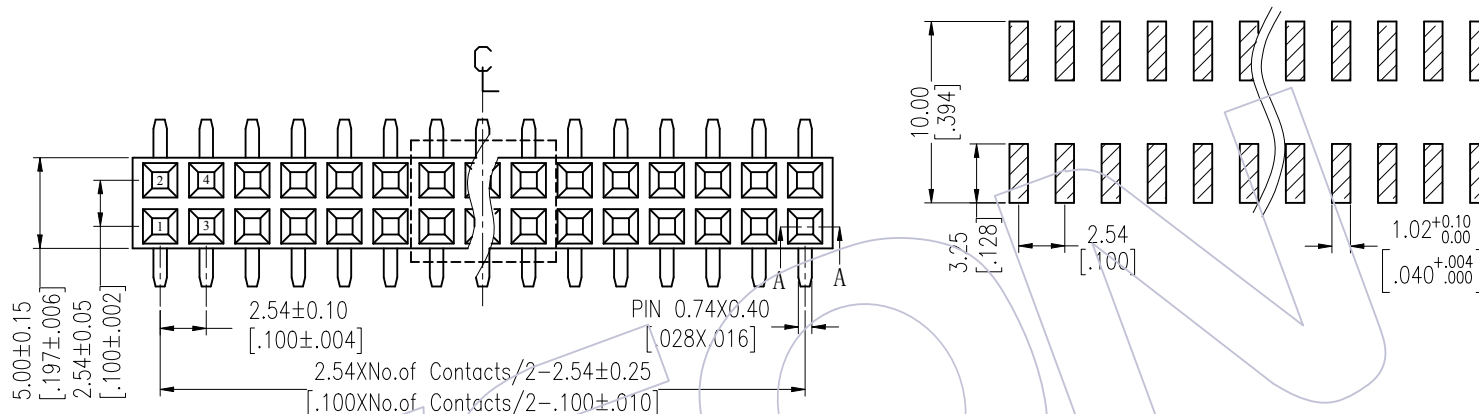



Ordering Information

2157 - 2 XX M XX CYN X I

No. of Pins per ROW: 02-40PIN

Contact Plating:
 G0=Gold Flash
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 S0=Gold Flash/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin
 SM=Matte Tin

Packing:
 T=Tube
 P=Tube+CAP
 R=Tube&Reel+CAP

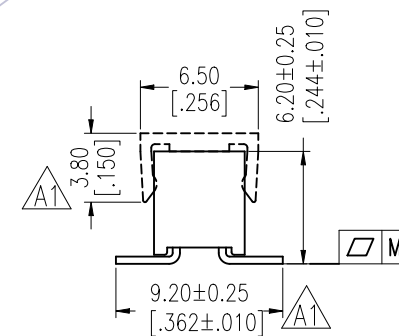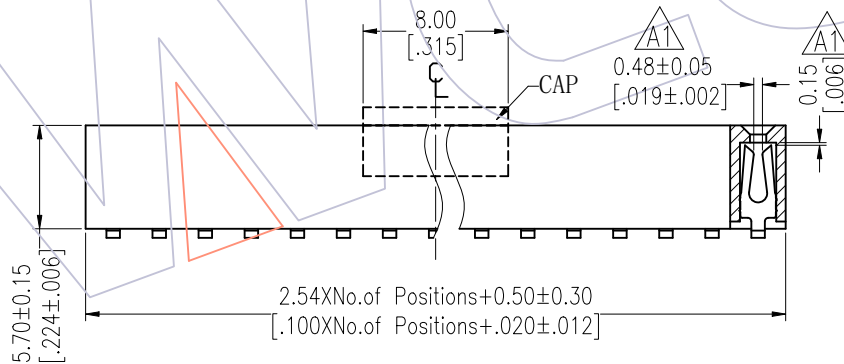

Item	Pitch	Mating
Standard	2.54	1115/1120/1125
Alternate		

A1	Pin(Per Row)	2-15P	16-25P	26-40P
	M	0.10	0.15	0.18

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW XSR	DATE	SCALE	FIT	PART NO. 2157-2XXMXXCYNX1
				Angle	± 3'					
A1	2021/08/04	Correct CAP, Add DIM, Modify DIM	-----	X.X	±0.40		2021/08/04			TITLE: 2.54mm Female Header DUAL ROW 180°SMT H=5.7
A0	2012/08/10	NEW	-----	X.XX	±0.25	CHECK				Customer NO.
				X.XXX	±0.15					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com