

HSF

TECHNICAL SPECS:

Current Rating: 3.0AMP
 Contact Resistance: 10m Ω Max
 Dielectric Strength: Min 1000V/RMS
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C36000)
 Contact plating: Au over Ni
 Connecting Pin: φ0.76mm
 Insulator Material: PPS+30%G.F(UL94V-0)





Ordering Information

3511-302 XX S XX 112 X 1

No. of Pins per Row: 02-50pin
 Contact Plating:
 G0=Gold Flash
 G3=10u'Gold
 G4=15u'Gold
 G5=30u'Gold

Packing:
 T=Tube
 A=Tray

Item	Pitch	Mating
Standard	2.54	3521
Alternate		

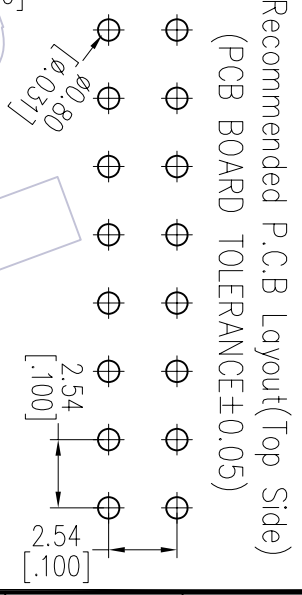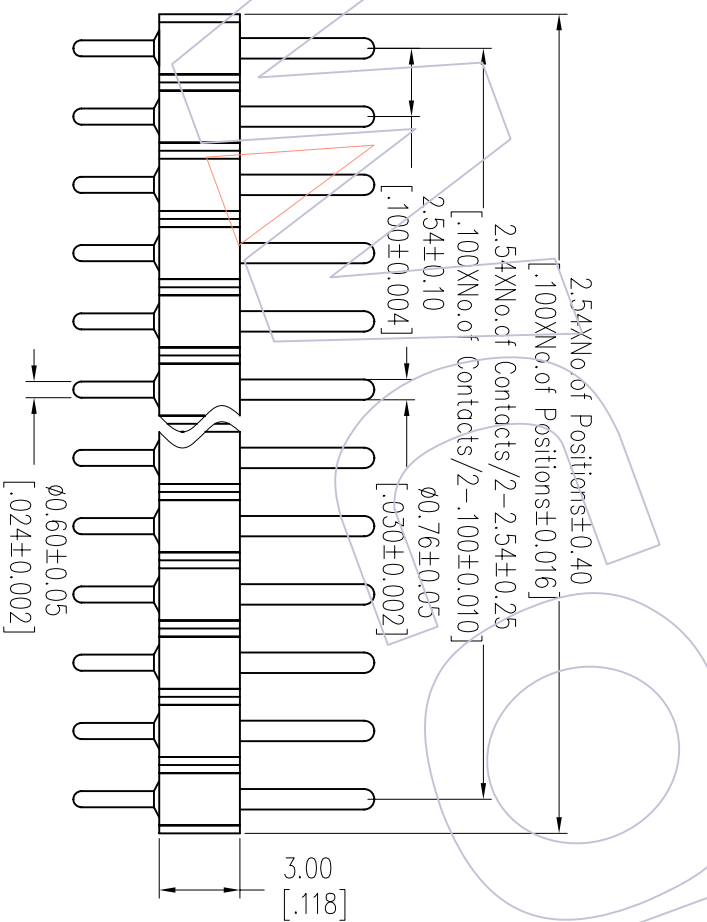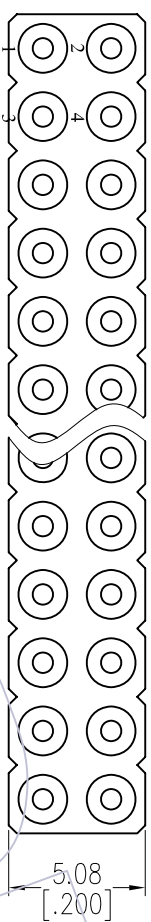

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dornguan	WCON-Kunshan
A0	2012/10/23	NEW		XX	JYHuang	2012/10/23	mm	A4	3511-302XXSXX112X1	2.54mm MACHINED PIN HEADER DUAL ROW 180° H=3.00 L=11.2	Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dornguan	WCON-Kunshan
				XX			mm	A4			Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com

WCON

Http: www.wcon.com