


NOTES:
 Rated Current:5.0AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-25℃ to +85℃

Insulator Material:PA66 UL94V-0
 Used With:WF3963-T
 Mated With:WF3963-Wafer

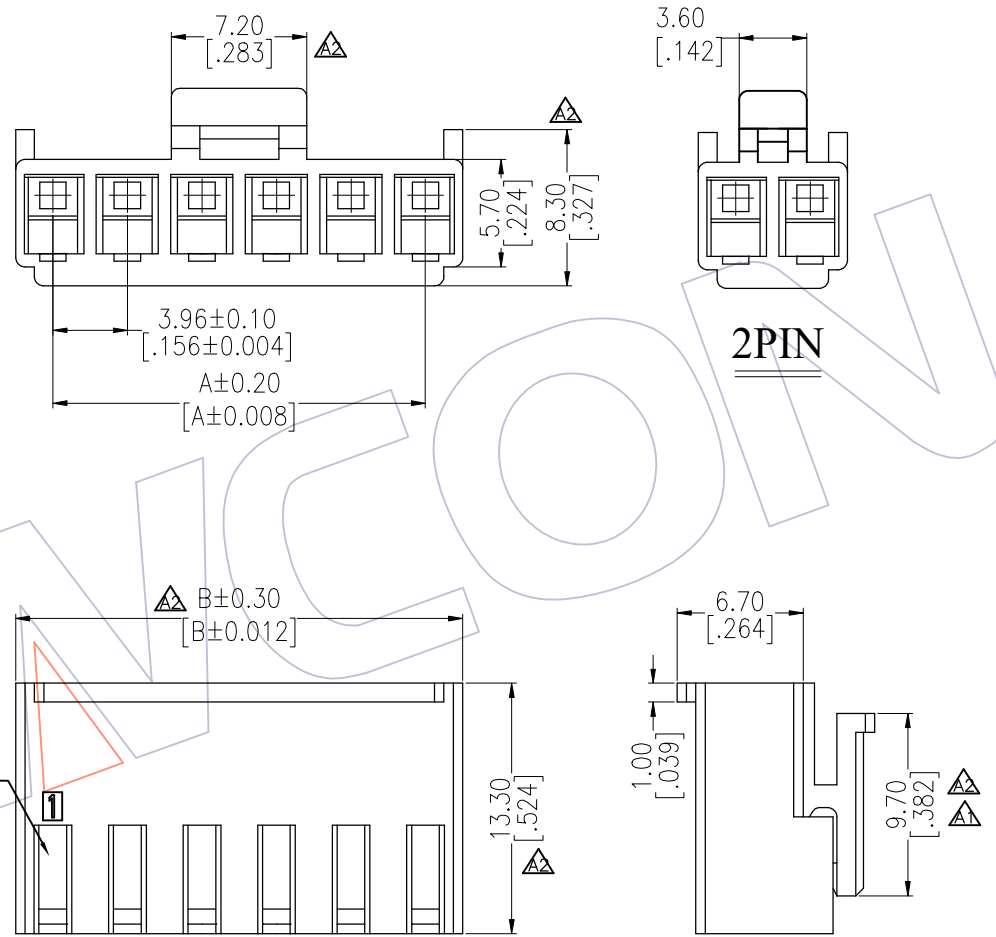

Ordering Information

WF 3963 - H XX X 0 1

No. of pins Color
 02pin~20pin W=White

PINS	A	△△	△△
2P	3.96	7.92	
3P	7.92	11.88	
4P	11.88	15.84	
5P	15.84	19.80	
6P	19.80	23.76	
7P	23.76	27.72	
8P	27.72	31.68	
9P	31.68	35.64	
10P	35.64	39.60	
11P	39.60	43.56	
12P	43.56	47.52	
13P	47.52	51.48	
14P	51.48	55.44	
15P	55.44	59.40	
16P	59.40	63.36	
17P	63.36	67.32	
18P	67.32	71.28	
19P	71.28	75.24	
20P	75.24	79.20	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A2	2019/07/15	Modify the drawing	—	X.X ±0.40	Ding	2019/07/15	UNIT mm		WF3963-HXXX01
A1	2016/06/20	MODIFY	—	X.XX ±0.30	CHECK	DATE	SIZE A4		TITLE: VH3.96 WAFER HOUSING
AO	2012/09/15	NEW	—	X.XXX ±0.15	APPROVE	DATE	SHEET 1/1		Customer NO.
				Angle ± 3°			PROJ. ⚡		
				DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan WCON-Kunshan
 Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com