

HSF

NOTES:
 Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C


Contact Material: Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+33%G.F UL94V-0

Ordering Information

3130-XX S XX BK 00 X X

No. of Pins	Contact Plating	Color Insulator	Packing
10 34	G0=Gold Flash	B=Black	T=Tube
12 40	G3=10u"Gold	W=White	P=Tube+CAP
14 44	G4=15u"Gold		R=Tape&Reel+CAP
16 50	G5=30u"Gold		
20 60	S0=Gold Flash/Tin		
24 64	S3=10u"Gold/Tin		
26 80	S4=15u"Gold/Tin		
30 100	S5=30u"Gold/Tin		
32	SN=Tin		

Item	Pitch	Mating	Dip(A)	L
Standard	1.27	5232/2334	2.30 3.00	6.8 7.6
Alternate				

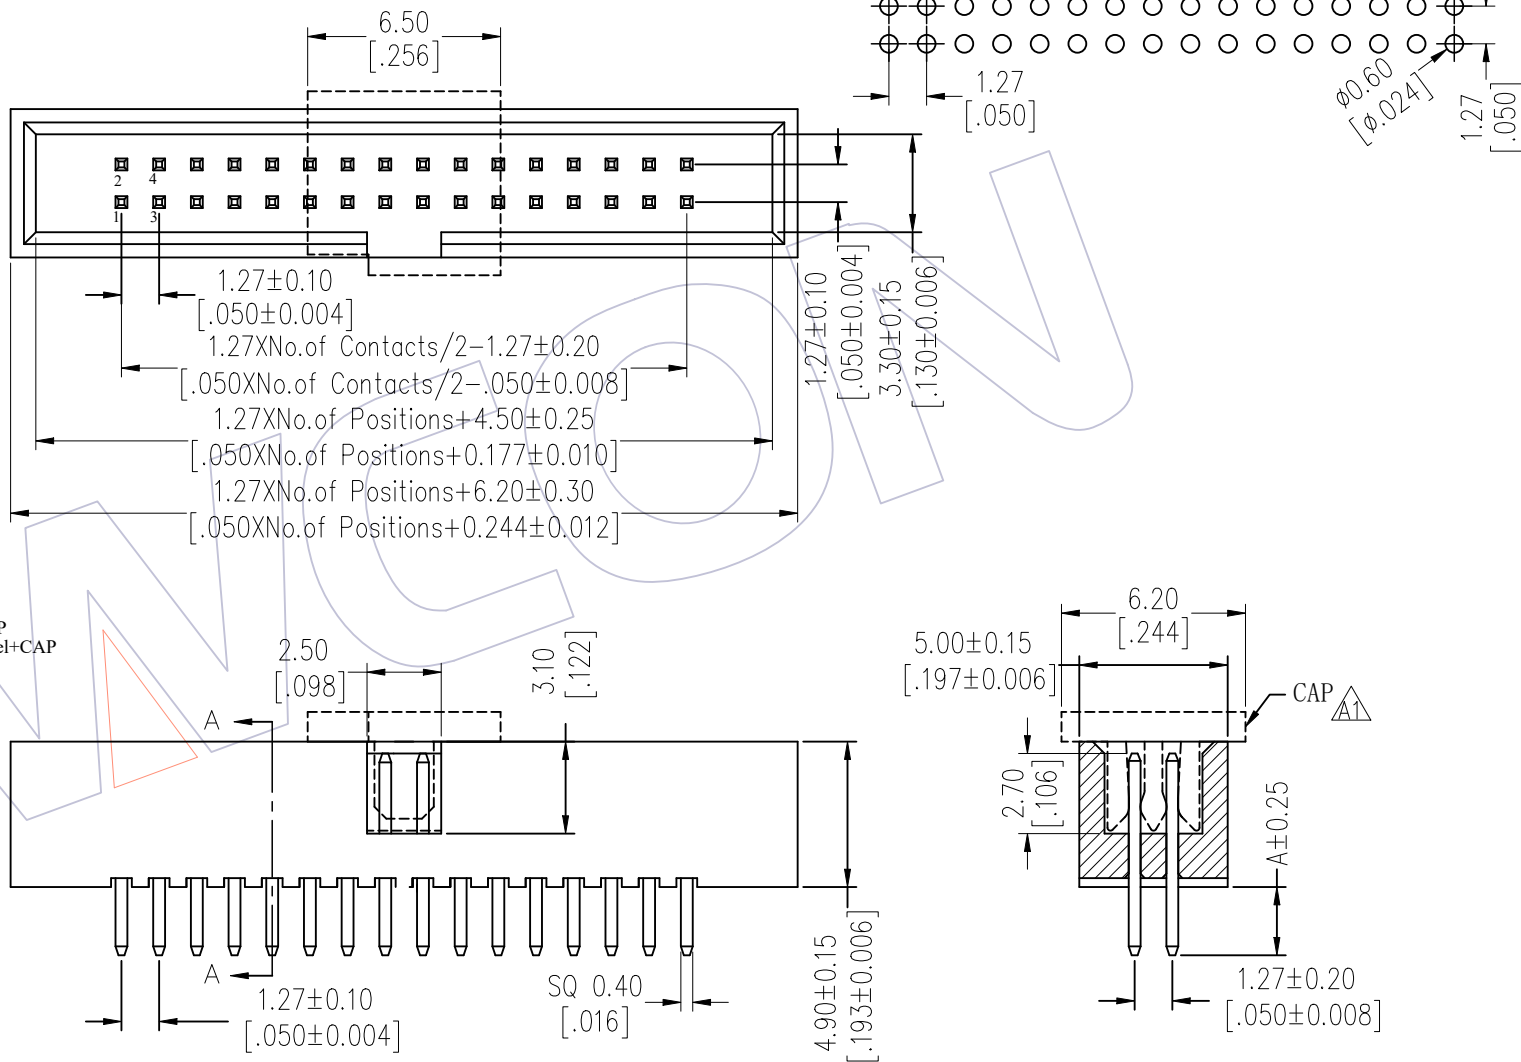

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A2	2021/06/18	Modify Form	△2	Du Ying	Du Ying	2021/06/18	UNIT	mm	3130-XXSXXBK00XX
A1	2017/11/28	Add the CAP	△1	Ding	CHECK	DATE	SIZE	A4	TITLE: 1.27 BOX HEADER 180° H=4.90
A0	2012/09/18	NEW	-----		APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle	± 3°		PROJ.		
				DIM	TOL				

WCON
 Http: www.wcon.com

WCON-Dongguan WCON-Kunshan
 Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com