



HSF

NOTES:

Rated Current:1.75AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:5000MΩ min $\triangle A3$
 Operation Temperature:-55°C to +125°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:LCP+30%G.F UL94V-0

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

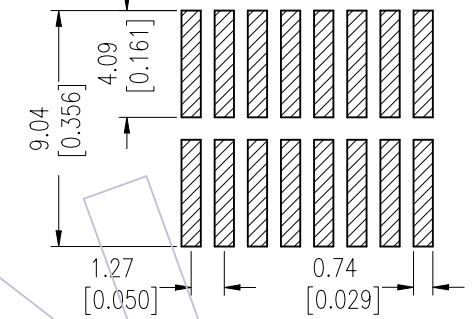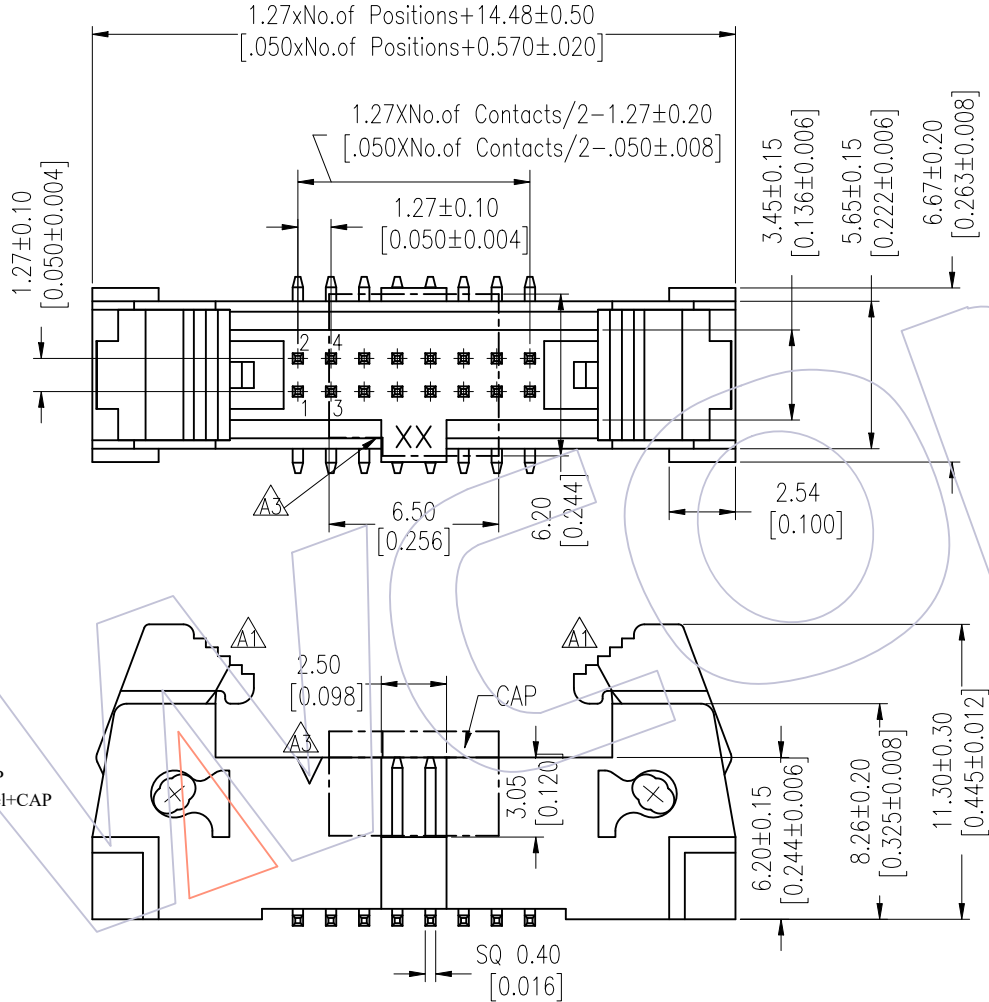

Ordering Information

3231- XX M XX B S T 1

No. of Pins	Contact Plating	Insulator Color	Packing
06 26	G0=Gold Flash	B=Black	T=Tube
08 30	G3=10u"Gold		P=Tube+CAP
10 34	G4=15u"Gold		R=Tape&Reel+CAP
14 40	G5=30u"Gold		
16 44	S0=Gold Flash/Tin		
20 50	S3=10u"Gold/Tin		
24	S4=15u"Gold/Tin		
	S5=30u"Gold/Tin		
	SN=Tin		

$\triangle A4$	PIN(PerRow)	06-20P	24-40P	44-50P
	M	0.10	0.12	0.15

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A4	2023/02/17	Add Flatness	DuYing	OPERATION	DuYing	2023/02/17	SCALE	FIT	3231-XXMXXBST1
A3	2012/08/31	Modify CAP	Tsingsn	X.X ±0.40	CHECK	DATE	UNIT	mm	TITLE:
A2	2010/08/09	Modify drawing		X.XX ±0.25			SIZE	inch	"S" Type SMT W/O fork
A0	2009/11/21	NEW		X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle ± 3'			PROJ		
				DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915
 Fax: +86 512 57468468
 E-mail: sales@wcon.com
 E-mail: salesks@wcon.com