


HSF

NOTES:
 Current Rating: 8A
 Voltage Rating: 300V
 Contact Resistance: 8milliohm Max
 Withstand Voltage: AC 1500V
 Insulation Resistance: 1000Megohm Min
 Screw Torque: 2 lbf.in
 Wire range: 16-30AWG
 Operation Temperature: -40°C to +105°C


Ordering Information:

P F 350 - C XX A SM N 1 N
 F=Female Pieth 350=3.50 No.of Pins 02-20P Contact Plated SM=Matte Tin Blank=W/T WCON Logo N=W/O WCON Logo
 Color Type
 A=Green N=Without Two Side Screw







11P	39.30 ±0.30	35.00 ±0.30			
10P	35.80 ±0.30	31.50 ±0.30	20P	70.80 ±0.40	66.50 ±0.40
9P	32.30 ±0.30	28.00 ±0.30	19P	67.30 ±0.40	63.00 ±0.40
8P	28.80 ±0.20	24.50 ±0.20	18P	63.80 ±0.40	59.50 ±0.40
7P	25.30 ±0.20	21.00 ±0.20	17P	60.30 ±0.40	56.00 ±0.40
6P	21.80 ±0.20	17.50 ±0.20	16P	56.80 ±0.40	52.50 ±0.40
5P	18.30 ±0.20	14.00 ±0.20	15P	53.30 ±0.40	49.00 ±0.40
4P	14.80 ±0.20	10.50 ±0.20	14P	49.80 ±0.30	45.50 ±0.30
3P	11.30 ±0.20	7.00 ±0.20	13P	46.30 ±0.30	42.00 ±0.30
2P	7.80 ±0.20	3.50 ±0.10	12P	42.80 ±0.30	38.50 ±0.30
PINS	A	B	PINS	A	B



W/O WCON LOGO



W/T WCON LOGO

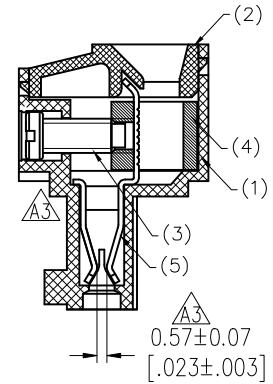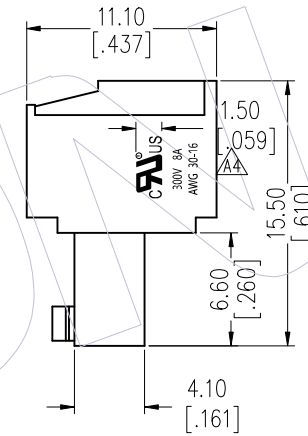

SECTION A-A

ITEM	TITLE	P/N	Q'TY	Material
(5)	Contact	TPT031-PSM001	N	C5191R-H T=0.3mm
(4)	Pin Block	BLO20-1BNI01	N	C3604
(3)	Screw	MA020-1SXX01	N	C1018
(2)	Cover	XPC350-XXB1XN1	1	PA66 UL94-V0
(1)	Housing	XPF350-XXB1XN1(N)	1	PA66 UL94-V0

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A4	2020/07/28	ADD LOGO; ADD W/O LOGO P/N	A4	XSR	XSR	2020/07/28	UNIT	mm	PF350-CXXASMN1(N)
A3	2018/04/12	Modify terminal ; ADD DIM.	A3	XSR	XSR		SIZE	A4	TITLE:
A2	2015/07/15	Modify	A2		CHECK		SHEET	1/1	3.50mm Pitch Female
A0	2011/06/07	NEW			APPROVE		PROJ.		Pluggable Terminal Blocks
									Customer NO.

WCON

Http: www.wcon.com

WCON-Dongguan WCON-Kunshan
 Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com