

HSF

NOTES:


Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Sn over Ni or Au over Ni
 Fit wire Range: 26#~28#AWG Δ

Ordering Information

3220- T P **XX** 0 1

Contact Plating
 S0=Gold Flash/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=Tin

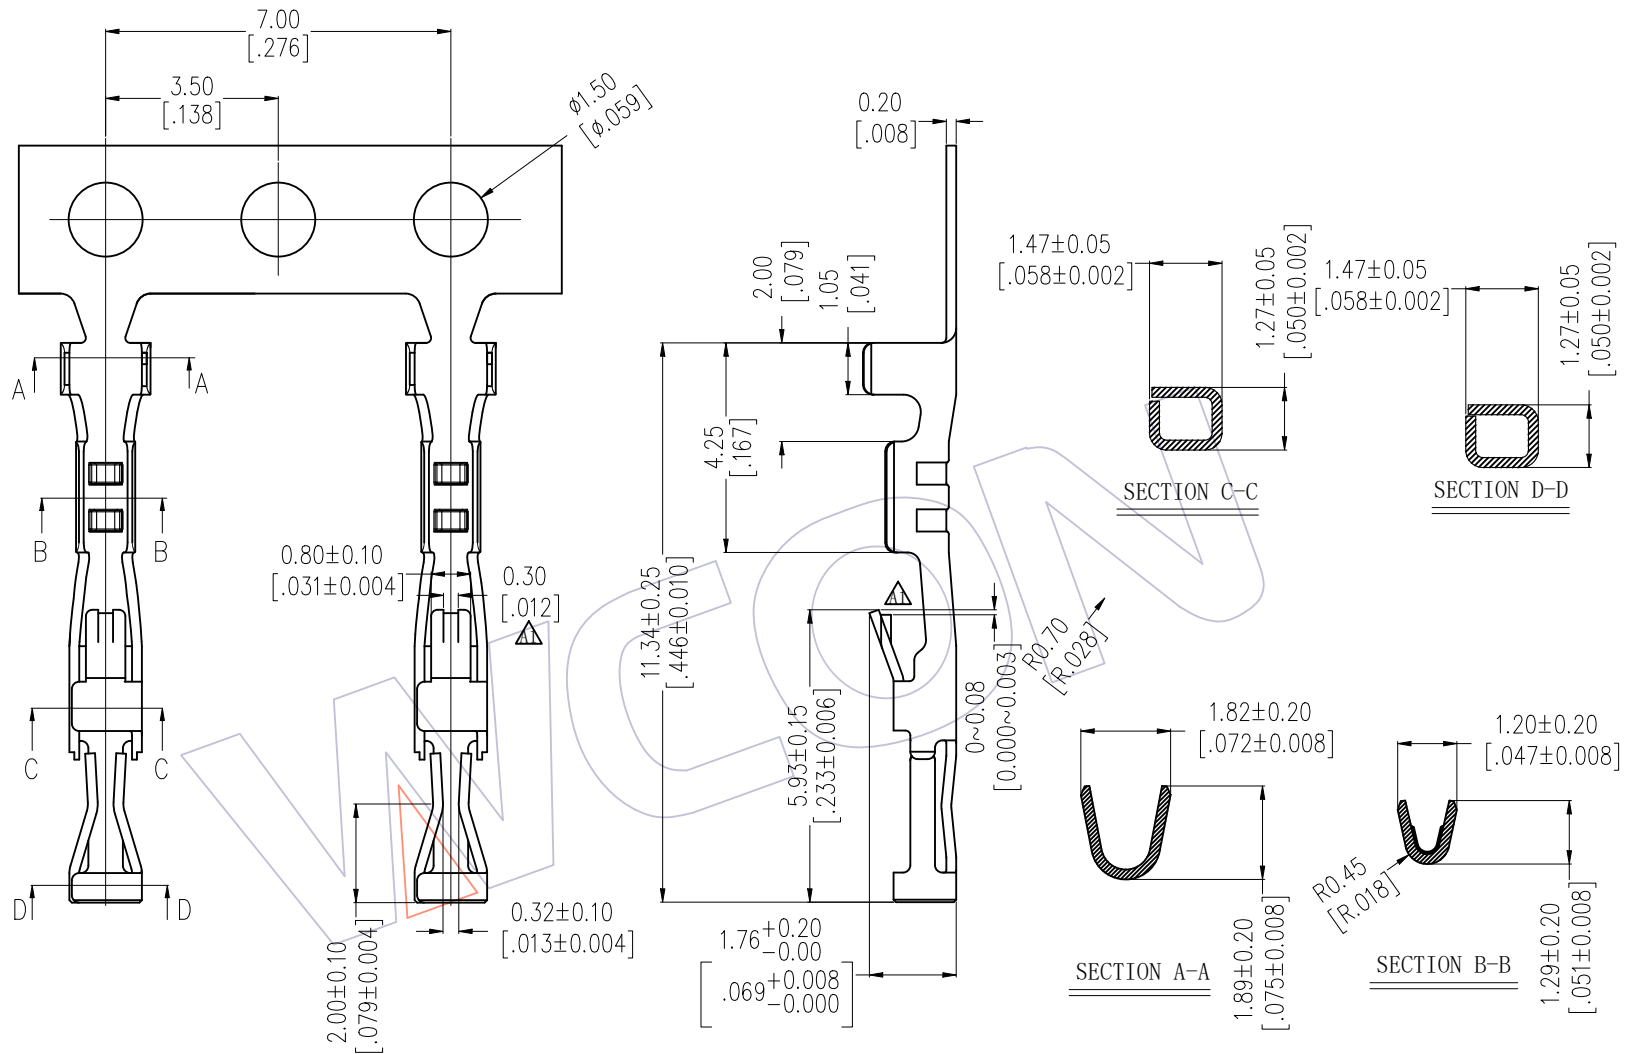

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A2	2017/10/26	Add wire Range	Δ	X.X ±0.40	SU	2019/10/26	UNIT	mm	3220-TPXX01
A1	2017/08/16	Modify	Δ	X.XX ±0.25	CHECK	DATE	in	mm	
A0	2016/09/22	NEW	—	X.XXX ±0.15	APPROVE	DATE	SHEET	A4	2.0mm Ejector Contact
				Angle ± 3°			1/1		
				DIM TOL			PROJ.		Customer NO.

WCON
 Http: www.wcon.com

WCON-Dongguan WCON-Kunshan
 Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com