

HSF

NOTES:

Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C


Contact Material: Brass Or Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0

6P Without Slot "M" and "N"
 8P-12P With Slot "M", Without Slot "N"
 14P-64P With Slot "M" and "N"

Ordering Information

5212-XX Y B XX B X 0 X

Two Parts Conn+Cover	No. of Pins 06P 26P 08P 30P 10P 34P 12P 36P 14P 40P 16P 44P 18P 50P 20P 60P 22P 64P 24P	Contact Material B=Brass P=Phosphor Bronze	Contact Plating S0=Gold Flash/Ni S3=10u"Gold/Ni S4=15u"Gold/Ni S5=30u"Gold/Ni SN=Tin	Color Insulator B=Black G=Grey(427C)	Bump N=W/O Bump W=With Bump
-------------------------	---	---	---	--	-----------------------------------

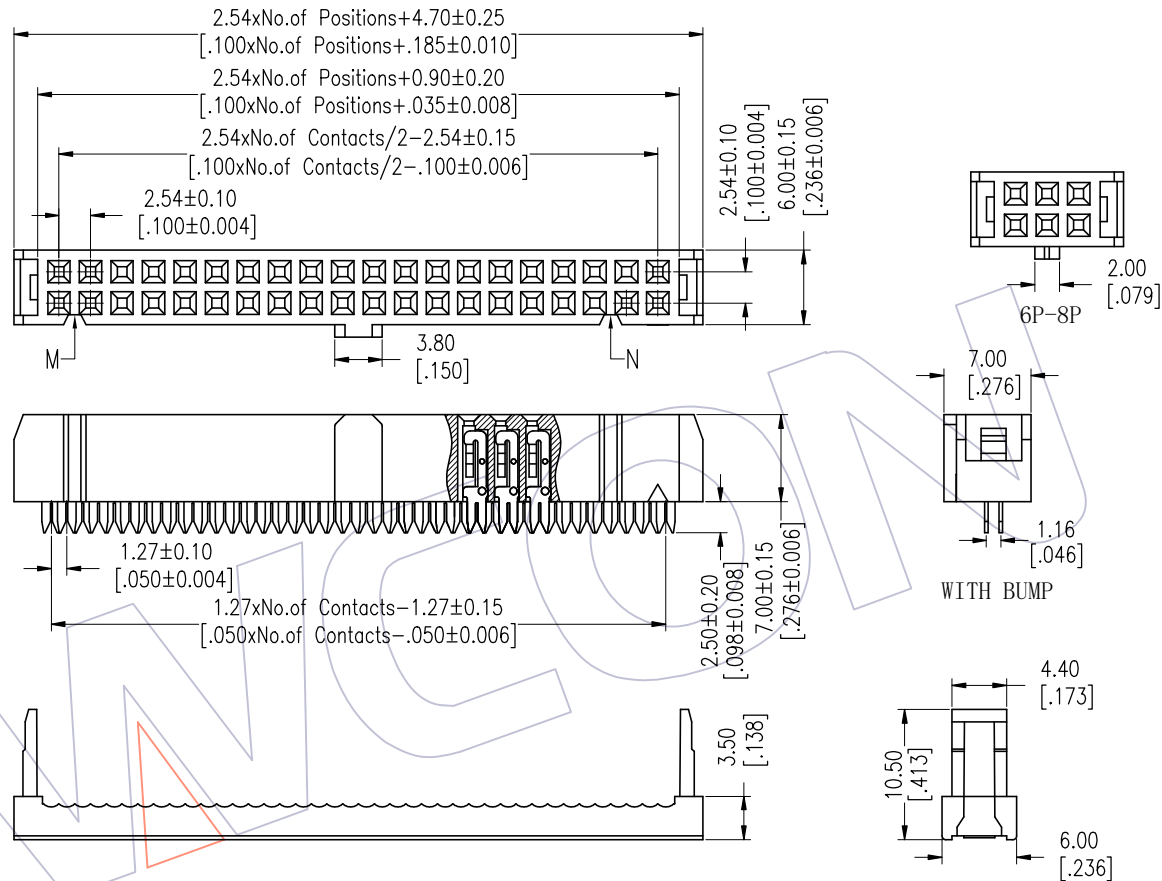

Item	Pitch	Mating
Standard	2.54	3110/3210
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW DuYing	DATE 2022/05/19	SCALE UNIT mm	FIT mm	PART NO. 5212-XXYBXXBX01
				x.x	±0.40					
A1	2022/05/19	Modify TITLE	DuYing	x.xx	±0.25	CHECK	DATE	SIZE A4	TITLE: 2.54 IDC SOCKET (ONE SIDE CONTACT)	
A0	2012/12/28	NEW	JYHuang	x.xxx	±0.15	APPROVE	DATE	SHEET 1/2	Customer NO.	
				Angle	± 3'			PROJ.		
				DIM	TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com