

HSF

NOTES:


Rated Current:1.0AMP.
 Contact Resistance:30mΩ Max.
 Withstand Voltage:500V AC for 1minute
 Insulation Resistance:3000MΩ Min.
 Operation Temperature:-40℃ to +105℃
 Terminated with AWG 28#

Contact Material:Phosphor Bronze(C5191)
 Contact Plating: Au over Ni
 Main Body Material:PBT+30%G.F
 Cover Material:PBT+30%G.F

Ordering Information

5251 - XX Y P SX X N 01

No. of Pins	Terminal Material	Plating	Insulator Colour	Insulator shape
02-32 pin	P:Phosphor Bronze	S0=Gold Flash/Ni S3=10u"Gold/Ni S4=15u"Gold/Ni S5=30u"Gold/Ni SN=Tin	B=Black	N:Without Bump

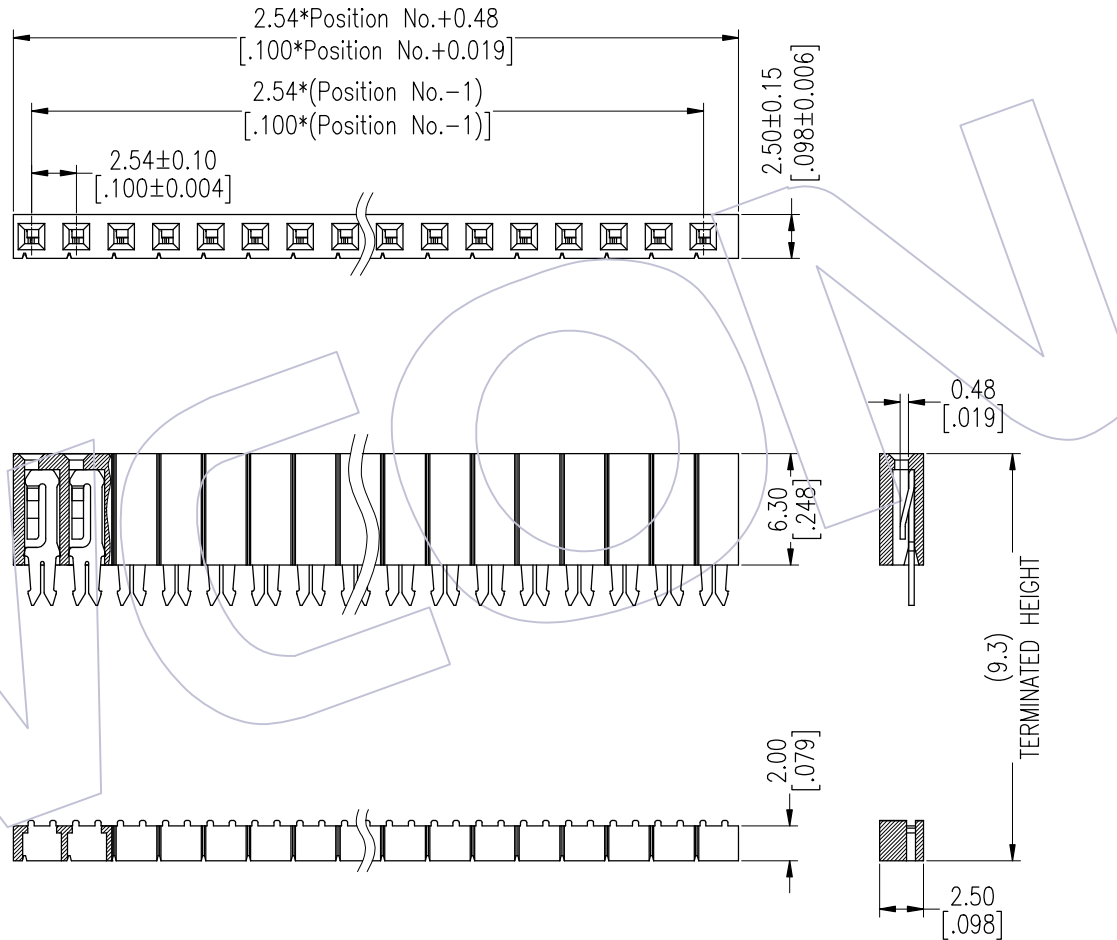

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE	Fit	PART NO.
				X.X	±0.40					
				X.XX	±0.25	CHECK	DATE	SIZE	A4	TITLE:
				X.XXX	±0.15	APPROVE	DATE	SHEET	1/1	2.54Pitch IDSS CONN
A0	2015/02/05	NEW		Angle	± 3'			PROJ.	☯	Customer NO.
				DIM	TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
---	--