
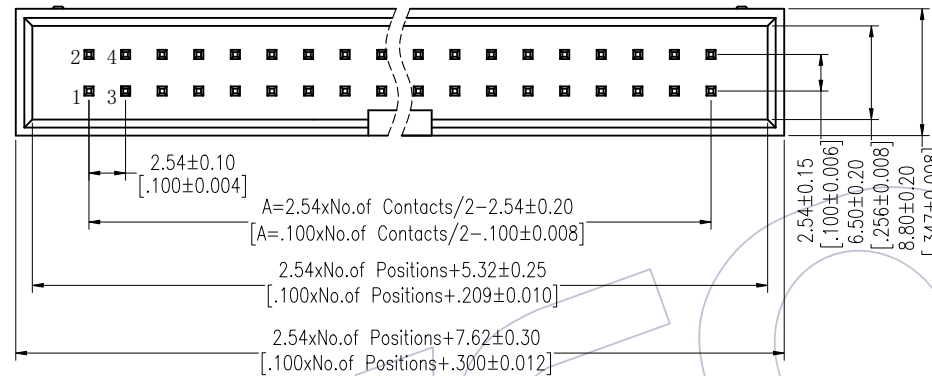
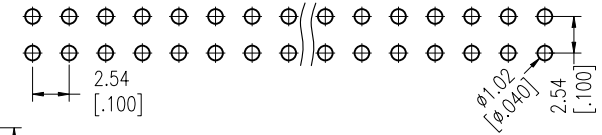


HSF

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:
 Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C



Contact Material:Brass
 Contact plating:Au Or Sn over Ni
 Insulator Material:PBT+30%G.F UL94V-0 



Ordering Information



3112-XX S XX B K00 X 1

No.of Pins	Contact Plating	Color Insulator	Packing:
10P 30P 14P 34P 16P 40P 20P 50P 24P 60P 26P 64P	G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin	B=Black U=blue G=Gray(427C) E=Gray(413C)	A=Tray T=Tube

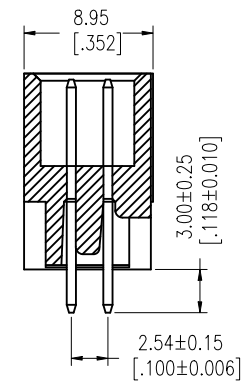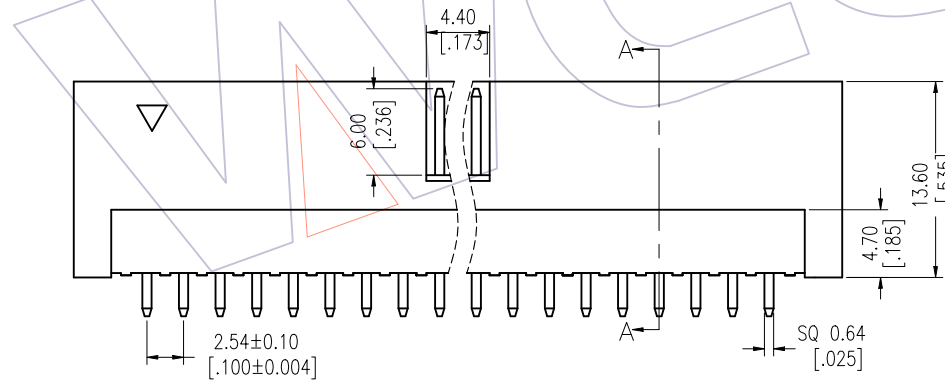

A(TOLERANCE)

ITEM	?20P	>20P
A	±0.20	±0.30

				OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				x.x ±0.40	Allen	2014/05/05	UNIT	mm	3112-XXSXXBK00XX
A1	2014/05/05	MODIFY		x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2012/09/25	NEW	-----	x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	2.54 BOX HEADER 180° H=13.6
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ± 3'			PROJ.		Customer NO.
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan WCON-Kunshan
 Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com