



HSF



No. 1: 产品装入真空盒内 (XXPCS/盒)
SB-31AB: 235*185*12mm真空盒




No. 2: 盖上盒盖




No. 3: 贴真空盒标签




数量标签及ROHS标签




No. 6: 打包装带



No. 5: 封箱及贴纸箱标签



贴外箱标签及ROHS标签

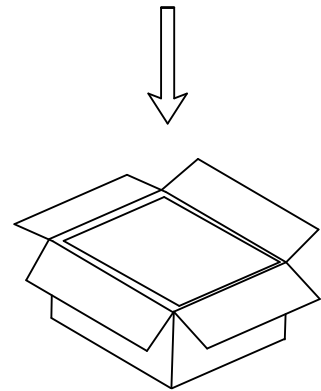

No. 4: 真空盒装入纸箱 (20盒/箱)
纸箱上下加入纸护板
CTN-05K (双坑K=K, 40*26.5*16.5CM)

说明:

1. 产品如图所示型态放入真空盒
2. 注意各标签样式. 位置及方向的一致性;
3. 打外箱包装带时需注意, 打为十字型.

变更 记录						零件图	颜色		SCALE	1:1	 WCON Hardware Electronics Co.,Ltd	
						X.	COLOR		UNIT	mm		
						X.X	±0.10	材质				
						X.XX	±0.05	DESING	颜亚芳	08/05/10		
						X.XXX	±0.02	CHECK				
						Angle		APPROVE				
A0	08/05/10		NEW			X.	± 2'		SHEET	1/1	料号 PART NO.	6211-XXMX00X01
版次 REV	日期 DATE		变更说明 MODIFICATION DESCRIPTION	变更 CHANGE	核准 APPROVE	DIM	TOL	核准 APPROVE	PROJ.		品名 TITLE:	D-Sub Male XXP 3排 打线式