


HSF

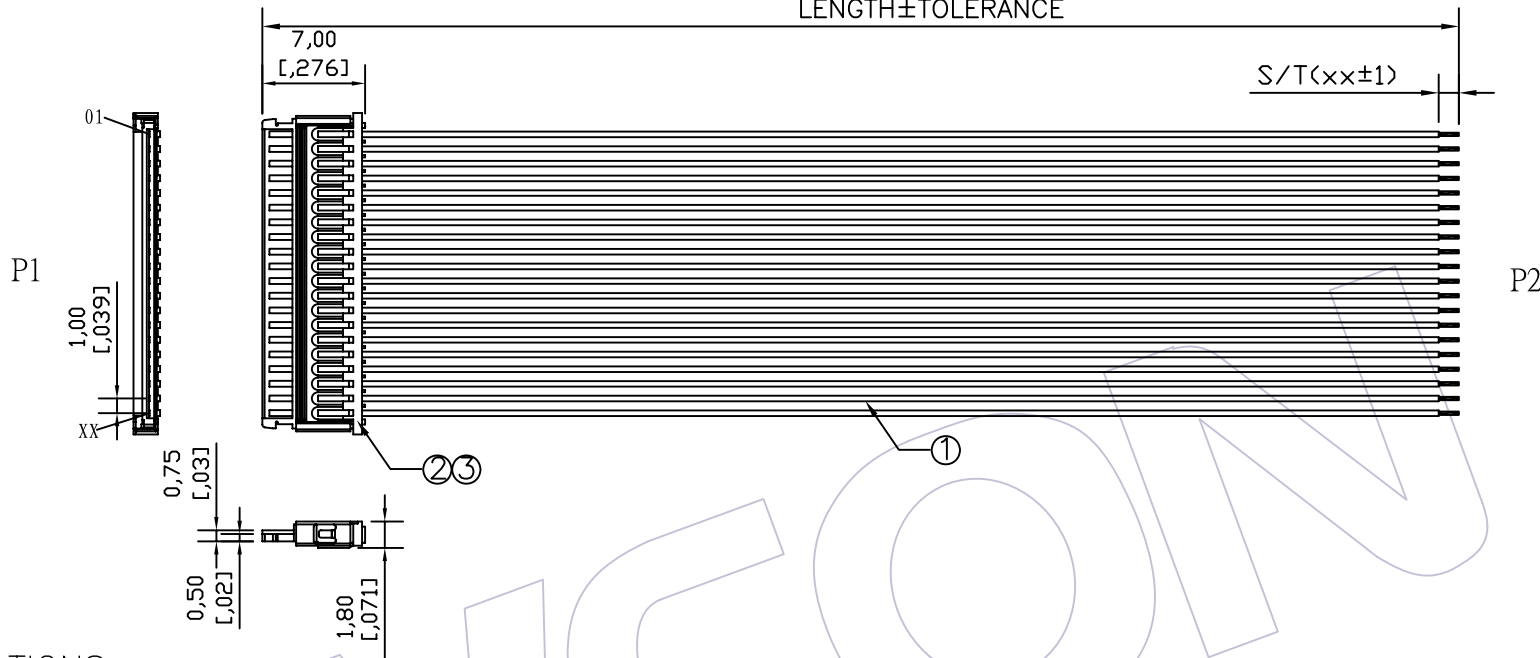

SPECIFICATIONS

Insulation Resistance: 5MΩ Min

Contact Resistance: 3.0Ω Max

Withstand Voltage: DC 300V, 10S

The Cable Assembly Must 100% Test

Ordering Information

C9100 - xx 01 xxx 101

No. of Pins:
14, 20, 30

Shape Style:
01=one end Process,
another one end plate tin

Length of Line

CONNECT METHOD

P1	Color	P2
01	XXX	OPEN
02	XXX	OPEN
03	XXX	OPEN
XX	XXX	OPEN

Wire SPEC	LENGTH	TOLERANCE
ULxxxx 30~34AWG	1~499	±5
	500~999	±10
	1000~1500	±15
	1501~3000	±20
	3001~5000	±30
	5001~	± Lx1%

③	WF1002-TPSN01	Terminal	PH1.0mm Phosphor Bronze Tin Terminal	xx	PCS
②	WF1002-HxxE01	Housing	PH1.0mm xxP BEIGE Housing	1	PCS
①	Wxxxx-1xxx00001	WIRE	UL: xxxx, AWG: 30-34, Color: xx, Wire	xxxx	MM
NO.	PART NO.	NAME	Specification	Q'TY	UNIT

工程图 ENGINEERING	绘图 DRAW	BEN	09/09/18	SCALE	FREE	WCON 维峰五金电子有限公司 WAFE HARDWARE ELECTRONICS CO. LTD	
X.X	±0.30	设计 DESIGN		UNIT	mm		
X.XX	±0.20	审核 CHECK		SIZE	A4	料号 PART NO.	C9100-xx01xxx101
X.XXX	±0.10	核准 APPROVE		SHEET	1/1	品名 TITLE:	PH1.0 **P Housing TO OPEN
Angle	± 2'			PROJ.	客户料号 Customer NO.		
DIM	TOL						