


HSF

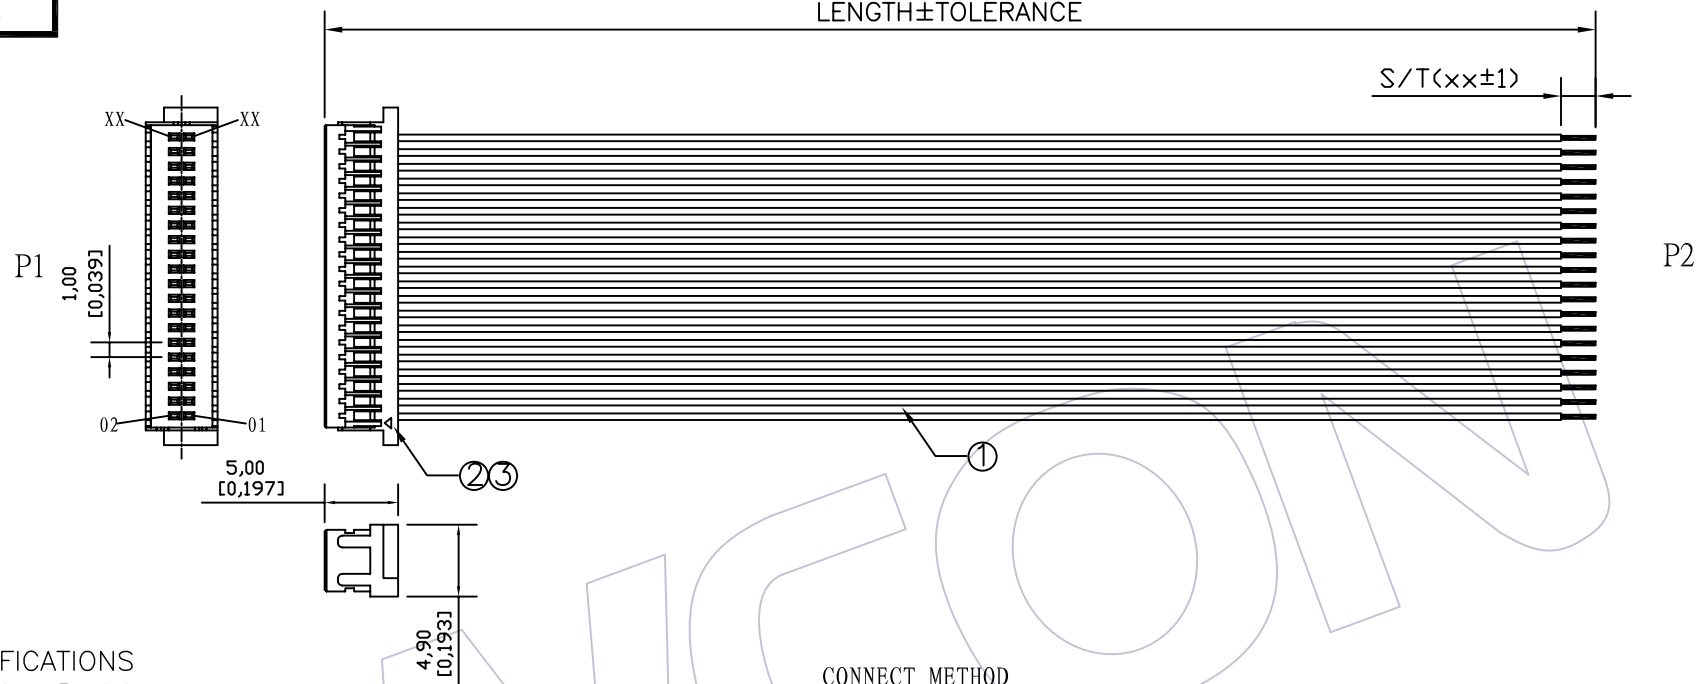

SPECIFICATIONS

Insulation Resistance: $5M\Omega$ Min

Contact Resistance: 3.0Ω Max

Withstand Voltage: DC 300V, 10S

The Cable Assembly Must 100% Test

Ordering Information

C9100 - xx 01 xxx 201

No. of Pins:

12 30
16 40
20 50

Shape Style:

01=one end Process,
another one end plate tin

Length of Line

CONNECT METHOD

P1 Color P2
01 XXX OPEN
02 XXX OPEN
03 XXX OPEN
XXX OPEN

Wire SPEC	LENGTH	TOLERANCE
ULxxxx 28~32AWG	1~499	± 5
	500~999	± 10
	1000~1500	± 15
	1501~3000	± 20
	3001~5000	± 30
	5001~	$\pm L \times 1\%$

③	WF1006-TPSN01	Terminal	PH1.0mm Phosphor Bronze Tin Terminal	xx	PCS
②	WF1006-Hxxx01	Housing	PH1.0mm xxP Color: xx Housing	1	PCS
①	Wxxxx-1xxx00001	WIRE	UL: xxxx, AWG: 28-32, Color: xx, Wire	xxxx	MM
NO.	PART NO.	NAME	Specification	Q'TY	UNIT

					工 程 图 ENGINEERING		绘图 DRAW	BEN	09/09/19	SCALE	FREE	WCON 维峰五金电子有限公司 WAFE HARDWARE ELECTRONICS CO. LTD	
					X.X	±0.30	设计 DESIGN			UNIT	mm		
					X.XX	±0.20		审 核 CHECK			SIZE	A4	料号 PART NO.
A0	09/09/19	NEW		_____	X.XXX	±0.10	核 准 APPROVE				SHEET	1/1	品名 TITLE:
版次 REV	日期 DATE	变 更 说 明 MODIFICATION DESCRIPTION		变更 CHANGE	核准 APPROVE	Angle ± 2'		核 准 APPROVE			PROJ.		客户料号Customer NO.
						DIM TOL							