

HSF

NOTES:




Current Rating: 1AMP  
 Contact Resistance: 30mΩ max  
 Withstand Voltage: 250V AC/DC  
 Insulation Resistance: 1000MΩ min  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor  
 Bronze(C5191-H)  
 Contact plating: Au Or Sn Over Ni  
 Insulator Material: PA9T+30%GF(UL94V-0)  
 Fixing Hardware plating: Au or Sn over Ni  
 Plating


Ordering Information

WF1271- 1 WZ H XX S0 B T 2

No. of Pins  
 4-50 PIN  
 Contact Plating  
 S0=Gold Flash/Tin  
 Packing:  
 T=Tube

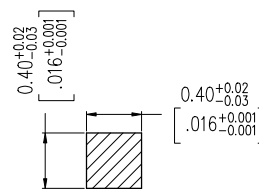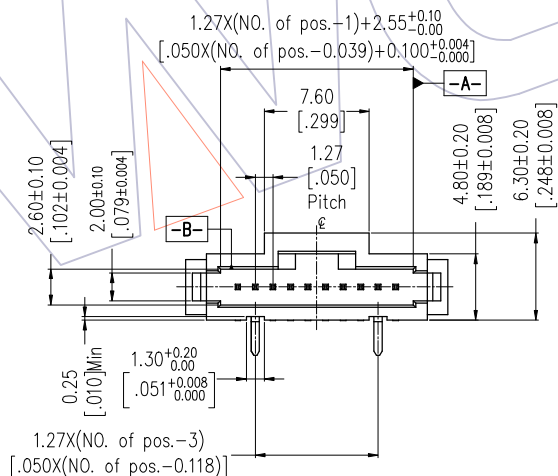
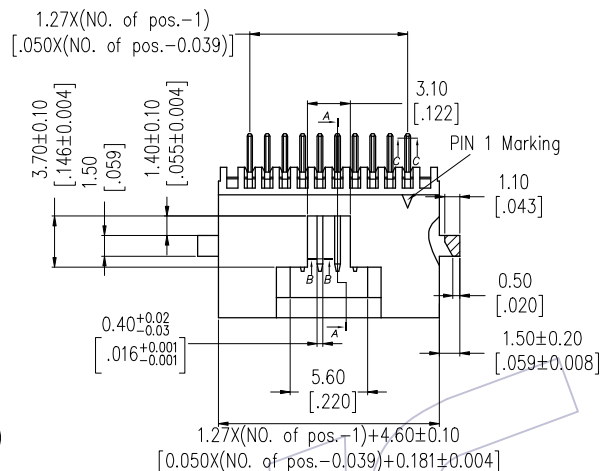


SECTION B-B  
 SCALE 10: 1




SECTION C-C  
 SCALE 10: 1

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

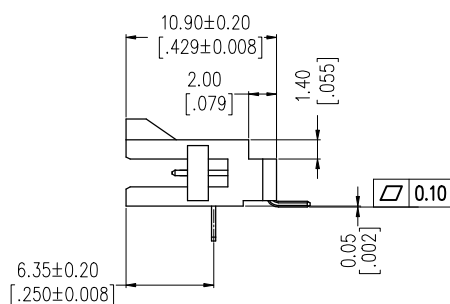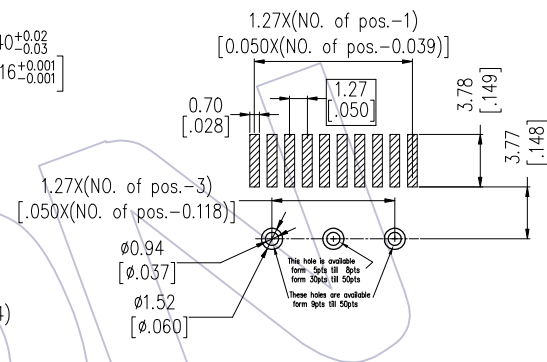

SECTION A-A  
 SCALE 1: 1

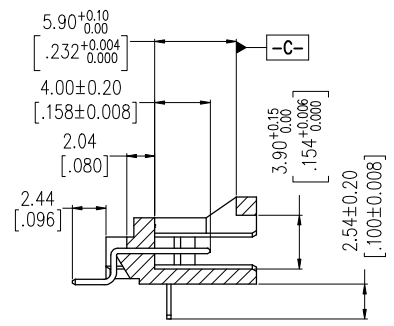

				OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	 Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
				X.X ±0.40	JYHuang	2016/07/17	UNIT	mm	WF1271-1WZHXXSOBT2	
				X.XX ±0.25	CHECK	DATE	SIZE	inch	TITLE:	
				X.XXX ±0.15	APPROVE	DATE	SHEET	A4	1.27 Wafer Conn 90°SMT With Fixing	
AO	2016/07/17	NEW		Angle ± 3°			SHEET	1/1	Customer NO.	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM TOL			PROJ.			