HSF

NOTES:
Current Rating: 1.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: −40℃ to +105℃

Contact Material:Phosphor Bronze
Contact plating:Au Or Sn over Ni
Insulator Material:PBT+30%G.F UL94V−0

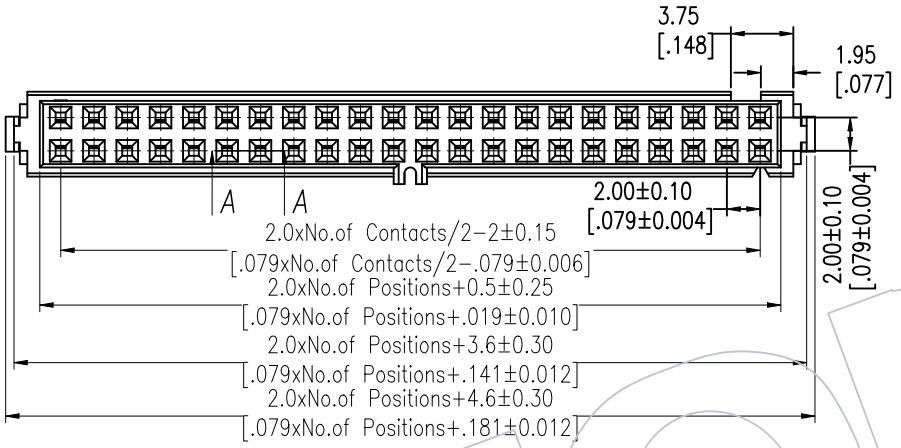

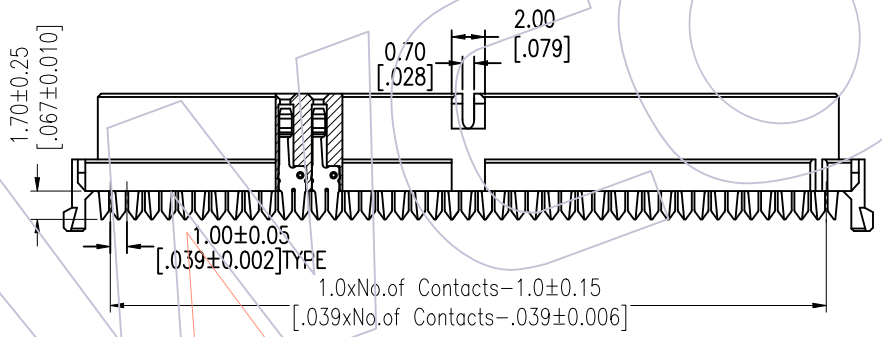

SECTION A−A

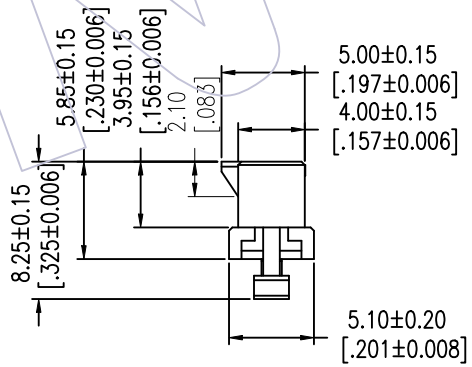

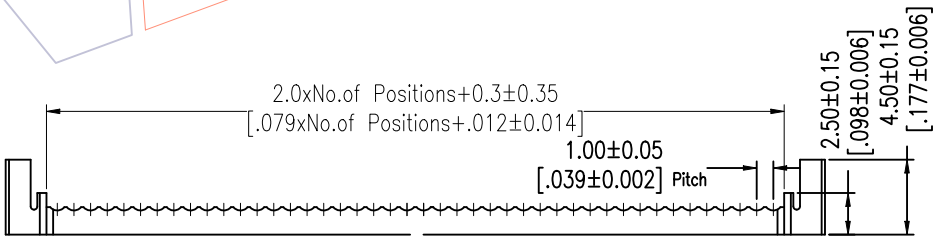



Ordering Information

5223- XX Y P XX B W 01

No.of Pins	Contact Plating	Color Insulator
06P 26P	S0=Gold Flash/Ni	B=Black
08P 30P	S3=10u"Gold/Ni	G=Grey(427C)
10P 34P	S4=15u"Gold/Ni	E=Grey(413C)
12P 36P	S5=30u"Gold/Ni	
14P 40P	SN=Tin	
16P 44P		
18P 50P		
20P 60P		
22P 64P		
24P		

Item	Pitch	Mating
Standard	2.00	3121
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/10/10	NEW	------

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	JYHuang	DATE	2012/10/10
CHECK		DATE	
APPROVE		DATE	

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. 5223-XXYPXXBW01

TITLE: 2.00 IDC SOCKET WITH BUMP(T-TYPE)

Customer NO.

WCON

Http: www.wcon.com

WCON−Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E−mail: sales@wcon.com

WCON−Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E−mail: salesks@wcon.com