HSF

NOTES:
Current Rating: 3.0AMP
Voltage Rating: 250V
Contact Resistance: 20mΩ Max
Withstand Voltage: 775V AC
Insulation Resistance: 1000MΩ Min
Operation Temperature: −55℃ to +105℃
Contact Material: Copper alloy
Contact plating:
XXu"Glod on contact area(See ordering information).
100u"Matte-Tin on solder area.
50u"Nickel underplating overall.
Insulator Material: LCP UL94V-0(Std)
IR soldering,Peak temperature: 260±5℃, 5s

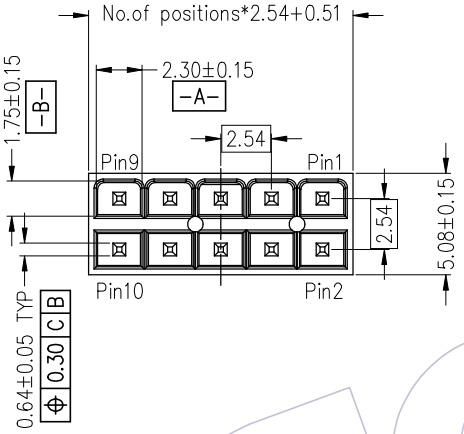



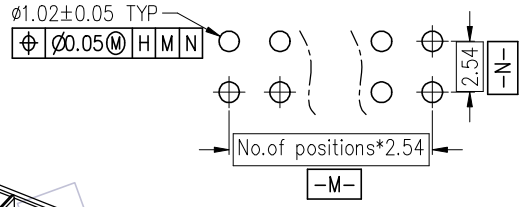

Ordering Information

3600 - P XXX - XXX S XX X 01

- TYPE P:Plug
- No.of Pins(Total) 010:10PIN (02~60Pin)
- Insulator Height 093:9.3mm
- Contact Shape S:180° DIP
- Contact Plating: W0=Gold Flash/Matte Tin, W3=10u" Gold/Matte Tin, W5=30u" Gold/Matte Tin
- Packing: T:Tube R:Tape&Reel
- Internal Code

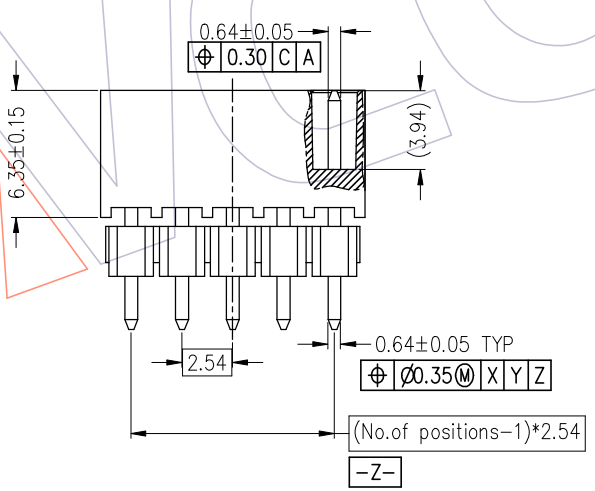

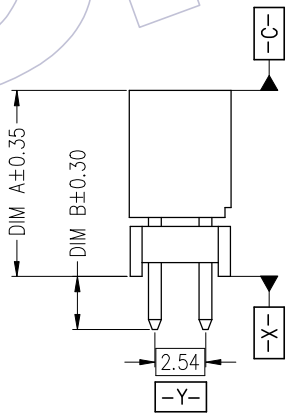

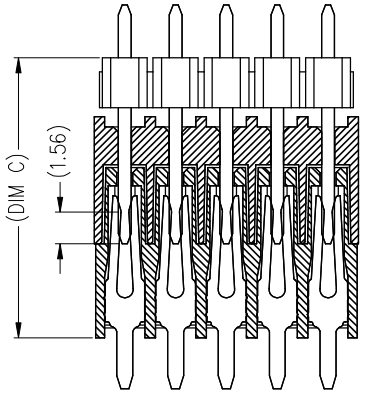

Female&Male mating

PN	DIM A	DIM B	DIM C
3600-PXXX-303SXXX01	30.30	2.46	35.00
3600-PXXX-253SXXX01	25.30	2.39	30.00
3600-PXXX-203SXXX01	20.30	2.31	25.00
3600-PXXX-153SXXX01	15.30	2.35	20.00
3600-PXXX-143SXXX01	14.30	2.46	19.00
3600-PXXX-123SXXX01	12.30	2.69	17.00
3600-PXXX-113SXXX01	11.30	2.16	16.00
3600-PXXX-093SXXX01	9.30	2.64	14.00

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2020/05/12	NEW	------

OPERATION	
X.X	±0.40
X.XX	±0.35
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	Bruce	2020/05/12
CHECK		DATE
APPROVE		DATE

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/2
PROJ.	

PART NO. 3600-PXXX-XXXSXXX01

TITLE: 2.54mm Board to Board Conn.,"S" Type,Plug,180°DIP,Increase the height

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com