
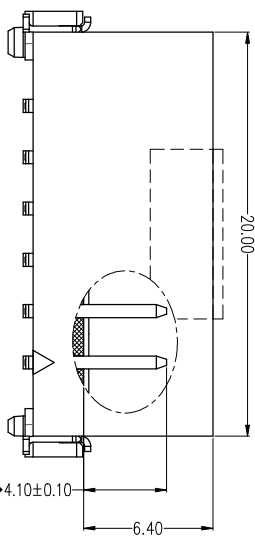
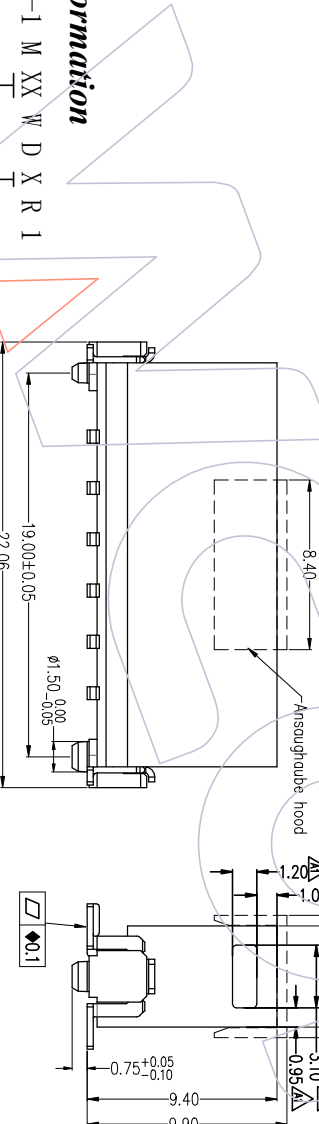
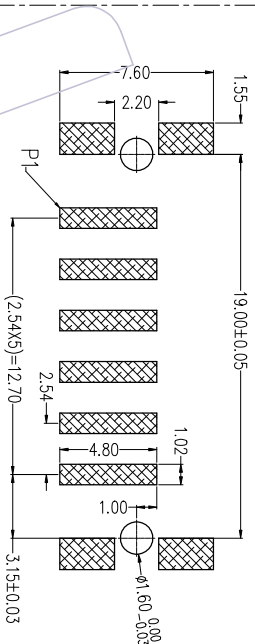


NOTES:

- 1.No.of Positions: 6 Pin
- 2.Rated Current:12.0 A Max;
- 3.Contact Resistance: 20mΩ Max;
- 4.Withstand Voltage: 2000V AC;
- 5. Insulation Resistance:1000MΩ Min ;
- 6.Operation Temperature: -55℃ to +150℃ ;
- 7.Contact Material:Copper Alloy
- 8.Contact Plating: Au or Sn Over Ni
- 9. Insulator Material:High Temperature Thermoplastic(UL94V-0)

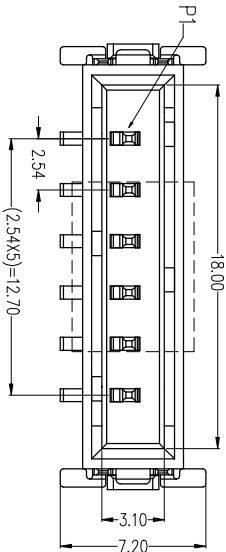

Ordering Information


3915-P 06-1 M XX W D X R 1

Contact Plated: _____

W3=10u" Gold /Matte Sn
W4=15u" Gold /Matte Sn
W5=30u" Gold /Matte Sn

Color: _____

B=BLACK
U=BLUE
G=GREEN
R=RED

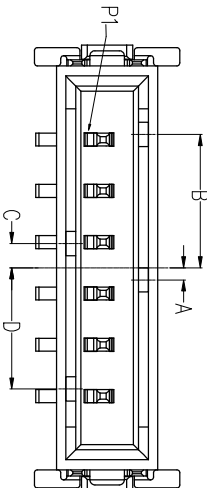

PART NO.	COLOR	防呆尺寸			
		A	B	C	D
3915-P06-1MXXWDBR1	BLACK	0.6	6.6	1.2	6.0
3915-P06-1MXXWDUR1	BLUE	1.8	5.4	2.4	4.8
3915-P06-1MXXWDGR1	GREEN	3.0	4.2	3.6	3.6
3915-P06-1MXXWDR1	RED	4.2	3.0	4.8	2.4

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE		FIT	PART NO.	TITLE:	Customer NO.
				XX	±0.40			UNIT	mm				
A1	2024/02/01	Modify Drawing	—	XXX	±0.25	CHECK	DATE	SIZE	A4	inch	3915-P06-1MXXWDXR1	LSC Connector - Single Row	
A0	2019/12/11	NEW	—	XXX	±0.15			SHEET	1/1			180SMT Plug (6 PIN)	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL.	APPROVE	DATE	PROJ.					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 E-mail: sdles@wcon.com

WCON-Kunshan Tel: +86 512 57468408 Fax: +86 769 85358915 E-mail: sdlesk@wcon.com