

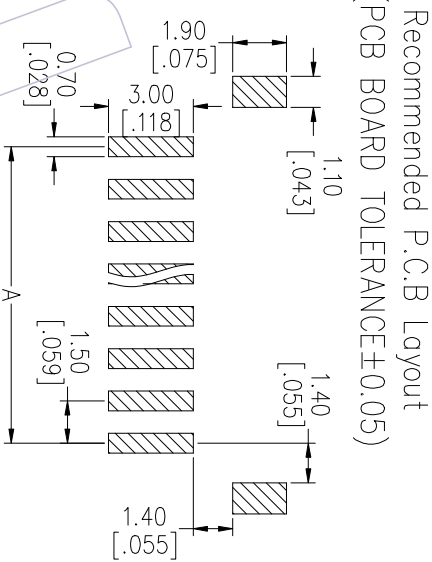
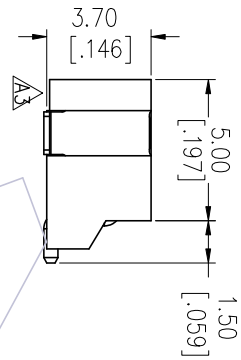


NOTES:
Rated Current:1.0AMP
Rated Voltage:50V AC/DC
Contact Resistance:20mΩ max
Withstand Voltage:500V AC/Minute
Insulation Resistance:500MΩ min
Operation Temperature:−40℃ to +105℃
Contact Material:Brass
Contact plating: Au Or Sn Over Ni
Insulator Material: PA6T+30%G.F UL94V−0

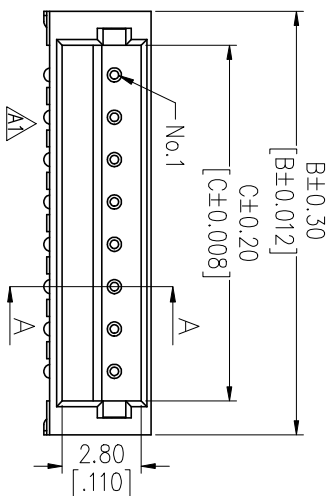

Ordering Information

WF1501 - WZ XX X X 1
No. of pins Contact Plating
02~15P G0=Gold Flash
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
Blank=Tin
Color
B=Black
F=Natural
R=Red
T=Tube
Packing
G0=Gold Flash
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
Blank=Tin

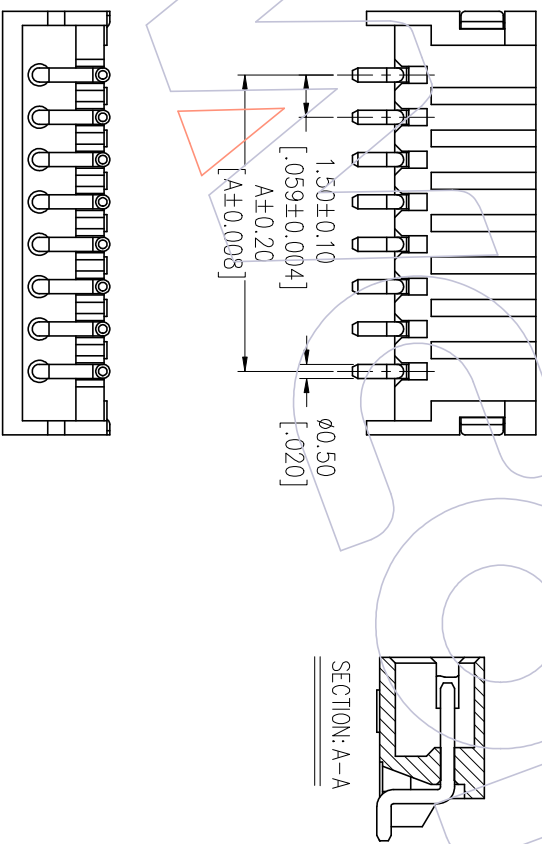

Specification & Ordering Information:

Circuit	Part No.	Dimension		
		A	B	C
02	WF1501-WZ02XX1	1.50	6.00	3.60
03	WF1501-WZ03XX1	3.00	7.50	5.10
04	WF1501-WZ04XX1	4.50	9.00	6.60
05	WF1501-WZ05XX1	6.00	10.50	8.10
06	WF1501-WZ06XX1	7.50	12.00	9.60
07	WF1501-WZ07XX1	9.00	13.50	11.10
08	WF1501-WZ08XX1	10.50	15.00	12.60
09	WF1501-WZ09XX1	12.00	16.50	14.10
10	WF1501-WZ10XX1	13.50	18.00	15.60
11	WF1501-WZ11XX1	15.00	19.50	17.10
12	WF1501-WZ12XX1	16.50	21.00	18.60
13	WF1501-WZ13XX1	18.00	22.50	20.10

A3	2019/04/18	Modify	—	OPERATION		DRAW	DATE	SCALE	FIT	PART NO.							
A2	2014/11/21	Modify	—	X.X	±0.40	Dwg	2019/04/18	UNIT	mm	WF1501-WZXXXX1							
A1	2013/04/26	PA6T+30%G.F--PA9T,MODIFY THE DRAWING	—	X.XX	±0.25	CHECK	DATE	SIZE	A4	TITLE:							
AO	2012/09/03	NEW	—	X.XXX	±0.15		DATE	SHEET	1/1	ZH 1.50 WAFER 90° SMT							
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	± 3°	APPROVE	DATE	PROJ.		Customer NO.							
				DIM	TOL												
										WCON-Dongguan				WCON-Kunshan			
										Tel: +86 769 85558920				Tel: +86 512 57468408			
										Fax: +86 769 85558915				Fax: +86 512 57468468			
										E-mail: sales@wcon.com				E-mail: sales@wcon.com			



WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com