HSF

NOTES:
Rated Current:See Table A4
Rated Voltage:600V AC/DC
Contact Resistance:20mΩ max
Withstand Voltage:1000V AC/Minute
Insulation Resistance:1000MΩ min
Operation Temperature:-40℃ to+105℃

Size Wire	Rated Current
AWG#18	9A
AWG#20	7A
AWG#22	5A
AWG#24	4A

A4

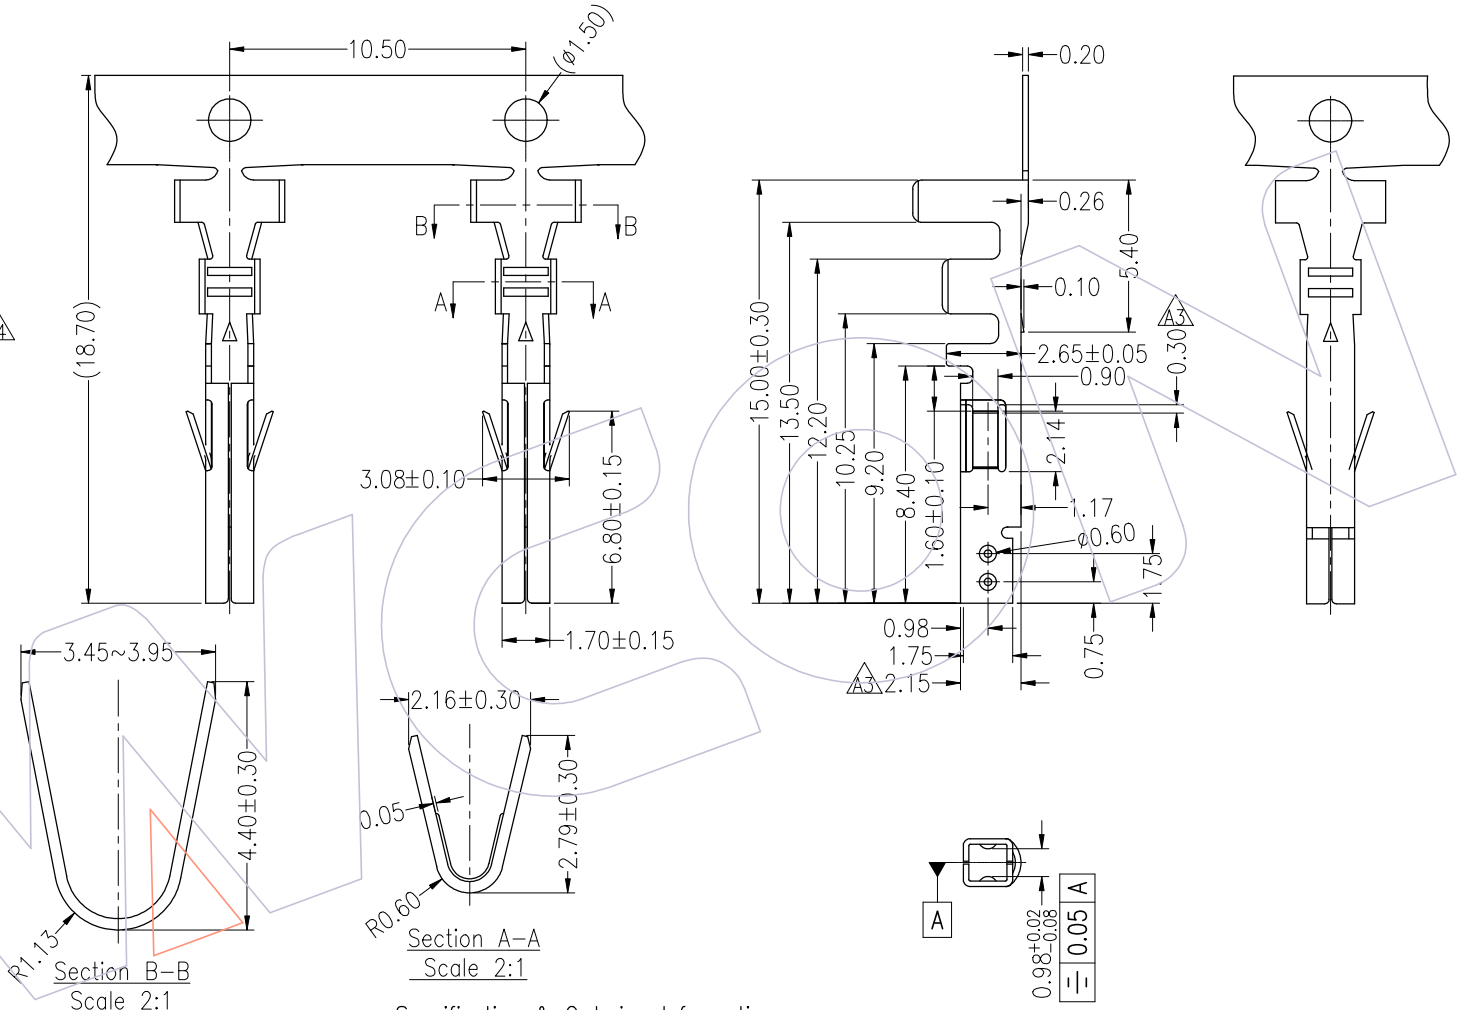

Ordering Information

WF4202 - T X XX 01

Material
B=Brass
P=Phosphor bronze

Contact Plating
G0=Gold Flash
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
S0=Gold Flash/Tin
S1=3u"Gold/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
SN=Tin

Specification & Ordering Information:

Part No.	Thickness	Finish	Material	Wire Range	Insulation O.D	Q'ty/Reel
WF4202-TXG001	0.20	Gold-flash	Phosphor bronze/Brass	AWG#18~#24	3.10mm(Max)	4,000pcs
WF4202-TXSN01	0.20	Tin-Plated	Phosphor bronze/Brass	AWG#18~#24	3.10mm(Max)	4,000pcs

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A4	2024/05/13	Modify Rated Current: See Table	CP
A3	2022/08/08	Adjust size A3	GH
A2	2020/08/28	Modify 6.80±0.15 A2	DuYing
A0	2012/09/17	NEW	———

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW CP	DATE 2024/05/13	SCALE	FIT
CHECK	DATE	UNIT	mm inch
APPROVE	DATE	SIZE	A4
		SHEET	1/1
		PROJ.	

PART NO. SEE TAB

TITLE: 4.20mm TERMINAL FEMALE

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com