

NOTES:

Current Rating: 5.0A AMP
Contact Resistance: 10milliohm Max
Withstand Voltage: 1000V AC/Minute
Insulation Resistance: 1000Megohm Min
Operation Temperature: -40℃ to +105℃

Housing Material: LCP+30%GF(UL94V-0)
Contact Material: Copper alloy
Contact plating: Au/Sn over Ni Plating



Ordering Information

WF3001-2 WS XX B X 2

Terminal shape:
WS: Wafer 180° DIP

NO. of Pins Per
Row: 01~12Pin

Packing:
0=PE Bag
T=Tube
A=Tray
R=Tap&Reel

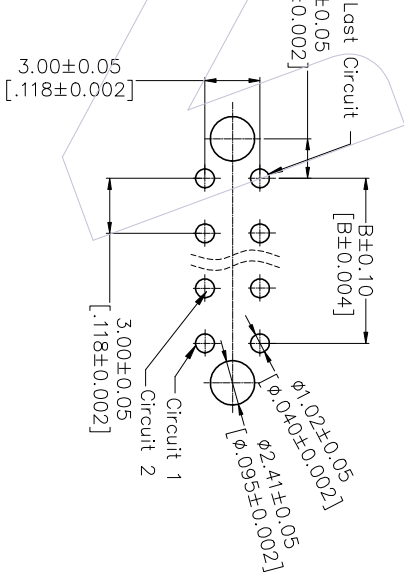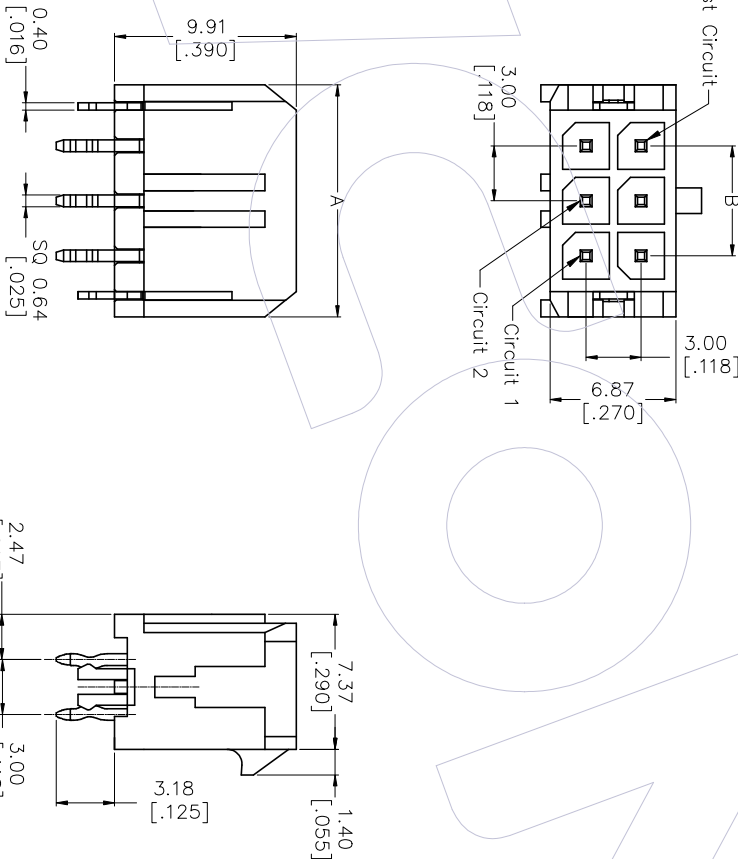

RECOMMENDED PCB LAYOUT
TOLERANCE IS ±0.05

Circuit	A	B
02	6.65[0.262]	NA
04	9.65[0.380]	3.00[0.118]
06	12.65[0.498]	6.00[0.236]
08	15.65[0.616]	9.00[0.355]
10	18.65[0.735]	12.00[0.473]
12	21.65[0.853]	15.00[0.591]
14	24.65[0.971]	18.00[0.709]
16	27.65[1.089]	21.00[0.827]
18	30.65[1.207]	24.00[0.945]
20	33.65[1.325]	27.00[1.063]
22	36.65[1.443]	30.00[1.181]
24	39.65[1.561]	33.00[1.299]



Http: www.wcon.com

WCON-Dongguan

Tel: +86 769 85358920

Fax: +86 769 85358915

E-mail: sales@wcon.com

WCON-Kunshan

Tel: +86 512 57468408

Fax: +86 512 57468468

E-mail: sales@wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com
WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com

WCON-Dongguan

Tel: +86 769 85358920

Fax: +86 769 85358915

E-mail: sales@wcon.com

WCON-Kunshan

Tel: +86 512 57468408

Fax: +86 512 57468468

E-mail: sales@wcon.com